


|           |         |          |      |
|-----------|---------|----------|------|
| LOC I-BER | APP CRS | Rwy Idg  | 6190 |
| 108.9     | 234°    | TDZE     | 18   |
|           |         | Apt Elev | 20   |

ILS Y or LOC Y RWY 23  
ADAK (ADK) (PADK)

|                                                                                                                                                                                                                                                                      |                                   |                                                                                                                                                           |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| ADF and DME required.                                                                                                                                                                                                                                                | MALS                              | MISSED APPROACH: Climb to 5400 direct ADK NDB/DME and on the 241° bearing from ADK NDB/DME to COMAT/ADK 10 DME and left turn direct ADK NDB/DME and hold. |
| <div><div></div><div></div></div> <div>Circling NA at night. Circling NA northwest of Rwy 5-23. Rwy 23 helicopter visibility reduction below ¾ SM NA. DME from ADK NDB/DME. Simultaneous reception of I-BER and ADK DME required. Cat E for USAF/USN use only.</div> | <div><div></div><div></div></div> |                                                                                                                                                           |

|                  |                                 |                 |
|------------------|---------------------------------|-----------------|
| AWOS-3P<br>134.5 | ANCHORAGE CENTER<br>126.4 254.3 | CTAF<br>122.9 0 |
|------------------|---------------------------------|-----------------|

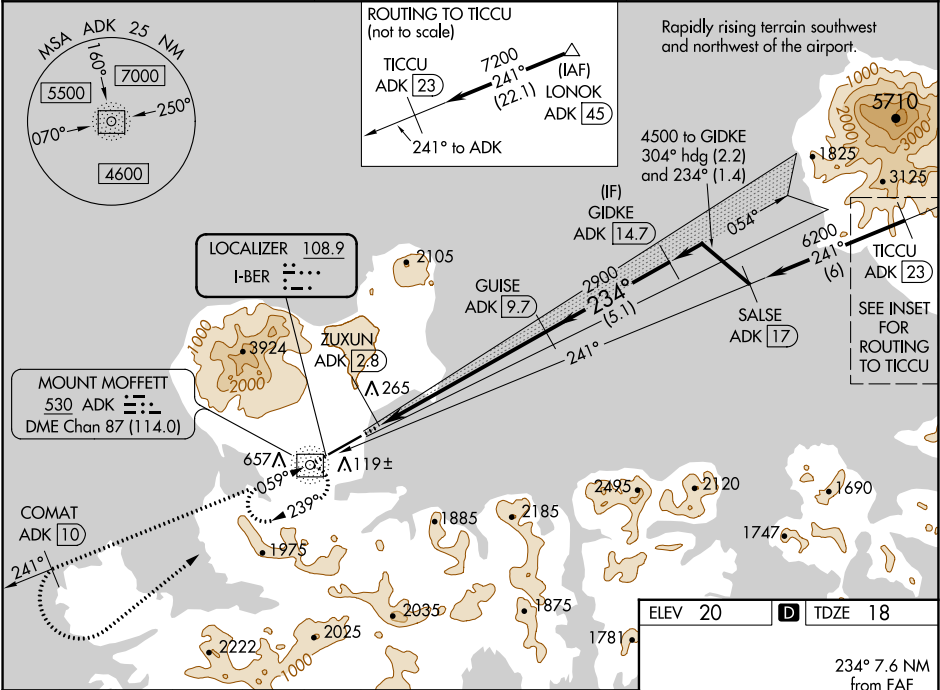

|             |                           |                           |                         |                         |                         |          |  |
|-------------|---------------------------|---------------------------|-------------------------|-------------------------|-------------------------|----------|--|
| 5400        | ADK                       | ADK                       | COMAT                   | ADK                     |                         |          |  |
| ↑           |                           | ADK 241°                  | ADK 10                  |                         |                         |          |  |
| *LOC only   |                           |                           |                         |                         |                         |          |  |
| ADK NDB/DME |                           | ZUXUN                     | *ADK                    |                         | GUISE                   | GIDKE    |  |
|             |                           | ADK 2.8                   | ADK 5.9                 |                         | ADK 9.7                 | ADK 14.7 |  |
|             |                           |                           |                         |                         |                         |          |  |
| CATEGORY    | A                         | B                         | C                       | D                       | E                       |          |  |
| S-ILS 23    | 1572-5 1554 (1600-5)      |                           |                         |                         |                         |          |  |
| S-LOC 23    | 1520-1¼<br>1502 (1500-1¼) | 1520-1½<br>1502 (1500-1½) | 1520-3 1502 (1500-3)    |                         |                         |          |  |
| CIRCLING    | 1520-1¼<br>1500 (1500-1¼) | 1520-1½<br>1500 (1500-1½) | 1520-3<br>1500 (1500-3) | 2400-3<br>2380 (2400-3) | 2440-3<br>2420 (2500-3) |          |  |

