

WAAS CH 60914 W31A	APP CRS 312°	Rwy Idg 7510 TDZE 43 Apt Elev 46
--	------------------------	---

RNAV (GPS) Y RWY 31
CORPUS CHRISTI INTL (CRP)


RNP APCH - GPS

A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C or above 54°C.
Procedure NA when Cabanis Fld traffic patterns active. For inop ALS, increase LPV Cat E visibility to $\frac{3}{4}$ SM, LNAV/VNAV all Cats visibility to $\frac{7}{8}$ SM, and LNAV Cat E visibility to $1\frac{3}{8}$ SM.


MALSR

MISSED APPROACH:
Climb to 2000 direct
ATHIS and hold.

ATIS 126.8	CORPUS APP CON 120.9 348.725	CORPUS TOWER 119.4 257.8	GND CON 121.9 269.15	CLNC DEL 118.55
---------------	---------------------------------	-----------------------------	-------------------------	--------------------

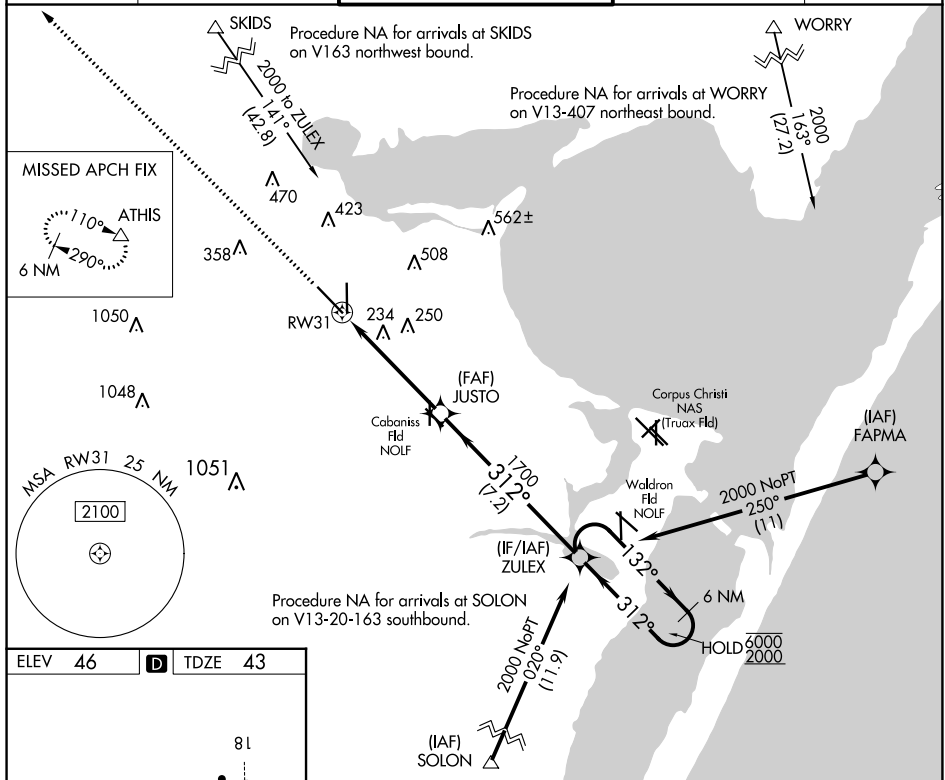

ELEV 46	D	TDZE 43
---------	----------	---------

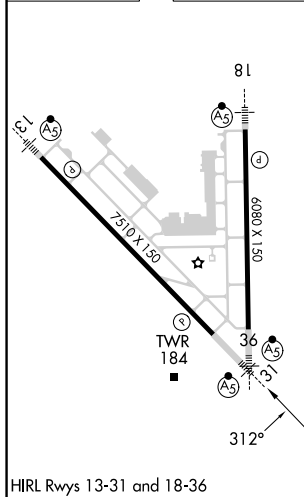

2000 ↑		ATHIS △		1.3 NM to RW31 JUSTO 1700 ZULEX 6 NM Holding Pattern 132° 312° 1700 GP 3.00° TCH 50							
CATEGORY		A		B		C		D		E	
LPV DA		243-½ 200 (200-½)									
LNAV/ VNAV DA		356-⅝ 313 (400-⅝)									
LNAV MDA		500-½ 457 (500-½)				500-⅞ 457 (500-⅞)					
C CIRCLING		500-1 454 (500-1)		780-1 734 (800-1)		820-2¼ 774 (800-2¼)		820-2½ 774 (800-2½)		820-2¾ 774 (800-2¾)	