

WAAS CH 93818 W17A	APP CRS 174°	Rwy Idg TDZE 657 Apt Elev 657	5000 657 657
--	------------------------	---	---

RNAV (GPS) RWY 17

CHESTER CATAWBA RGNL (DCM)

RNP APCH-GPS.


▼

▲

Circling for Rwy 5-23 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 47°C. Visibility reduction by helicopters NA. When local altimeter setting not received, use Rock Hill altimeter setting and increase all DA 33 feet and all MDA 40 feet and LNAV Cat D visibility ¼ mile. Baro-VNAV and VDP NA when using Rock Hill altimeter setting.

MISSED APPROACH:
Climb to 3000 direct HUSNY and hold.

AWOS-3 120.975	CHARLOTTE APP CON 120.05 307.8	UNICOM 122.7 (CTAF) 0
--------------------------	--	---------------------------------

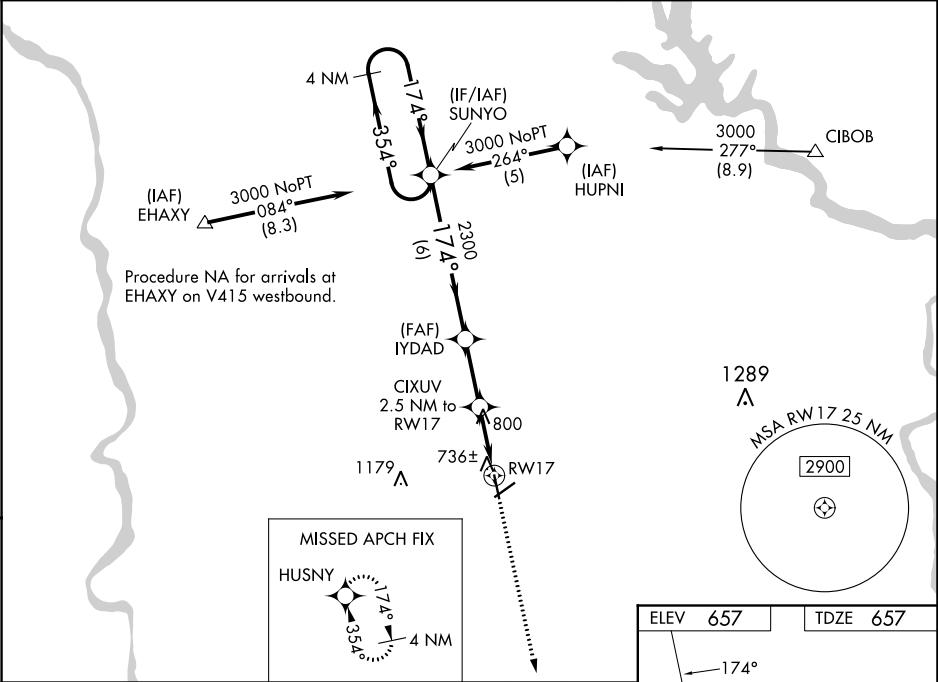

4 NM Holding Pattern		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 26).		3000	HUSNY
3000 ← 354°		174° →		*LNAV only.	
GP 3.00° TCH 34		2300		*1.1 NM to RW17	
6 NM		2.5 NM		1.4 NM	
CATEGORY		A		B	
LPV DA		907-1		250 (300-1)	
LNAV/VNAV DA		1134-1¾		477 (500-1¾)	
LNAV MDA		1060-1		403 (500-1¼)	
CIRCLING		1160-1		503 (600-1)	
		1280-1¾		623 (700-1¾)	
		1480-2¾		823 (900-2¾)	

