


APP CRS	Rwy Idg	10001
216°	TDZE	632
	Apt Elev	645

RNAV (RNP) X RWY 21L

DETROIT METRO WAYNE COUNTY (DTW)

RNP AR APCH.			MALSRL	MISSED APPROACH: Climb to 1100 then climbing left turn to 4000 direct GAAGE and hold, continue climb-in-hold to 4000.		
Simultaneous approach authorized. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For uncompensated Baro-VNAV systems, procedure NA below -19°C or above 54°C.						
D-ATIS	DETROIT APP CON	METRO TOWER	GND CON	CLNC DEL	CPDLC	
133.675	125.15 284.0	118.4 317.725	121.8 (NW) 132.725 (SW)	119.45 (NE) 119.25 (SE)	120.65	

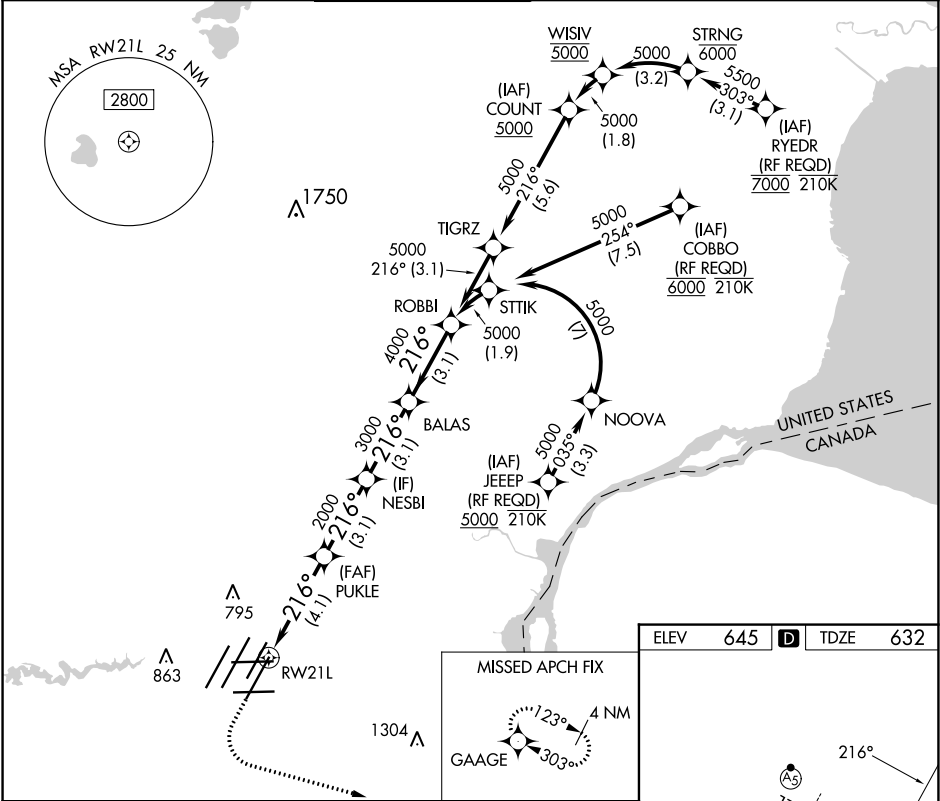

1100	4000	GAAGE	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 80).				ROBBI
							5000
			PUKLE	NESBI	BALAS	216°	5000
			2000	3000	4000		
			4.1 NM	3.1 NM	3.1 NM	3.1 NM	
CATEGORY	A		B		C	D	
RNP 0.30 DA	1062/40 430 (500-¾)						
AUTHORIZATION REQUIRED							

