

WAAS CH 53530 W32A	APP CRS 317°	Rwy Idg TDZE 1082 Apt Elev 1083
--	------------------------	---

RNAV (GPS) RWY 32


LAC QUI PARLE COUNTY (DXX)

RNP APCH.

Baro-VNAV NA when using Appleton Muni altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use Appleton Muni altimeter setting: increase LPV DA to 1329 feet; increase LNAV/VNAV DA to 1409 feet and visibility ¼ SM; increase all MDAs 60 feet and Circling Cat C visibility ½ SM. Circling NA to Rwy 9 and 27.

MISSED APPROACH: Climb to 3000 direct WERUL and hold.

AWOS-3 118.975	MINNEAPOLIS CENTER 128.5 306.2	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------------

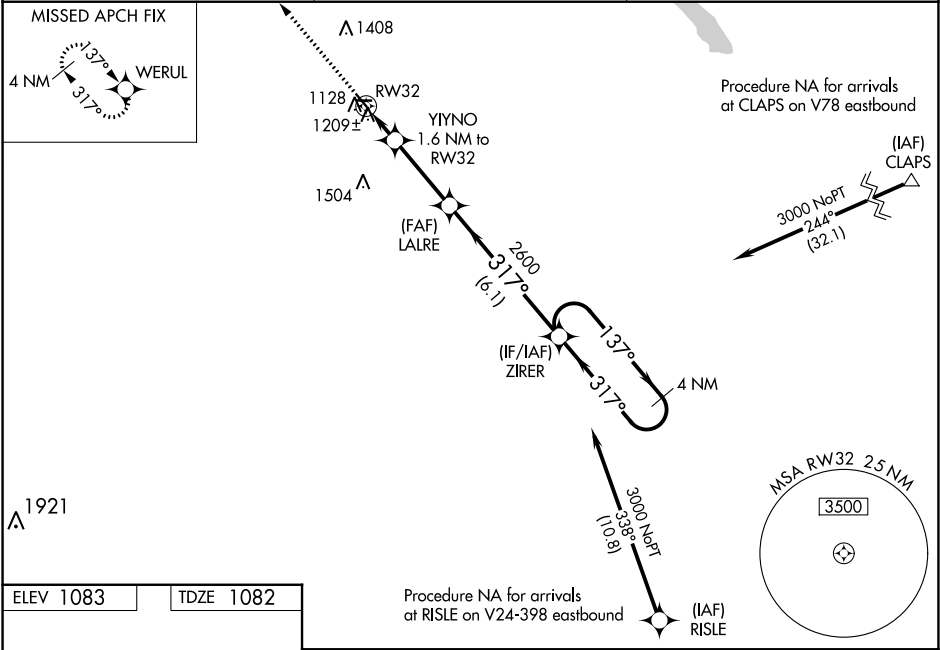

3000	WERUL	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 23).			
* LNAV only	YIYNO	1.6 NM to RW32	LALRE	ZIRER	4 NM Holding Pattern
RW32	2600	317°	2600	137°	3000
1620*	1.6 NM	3 NM	6.1 NM		
CATEGORY	A	B	C	D	
LPV DA	1282-1 200 (200-1)				NA
LNAV/VNAV DA	1363-1 281 (300-1)				NA
LNAV MDA	1460-1	378 (400-1)	1460-1 ¾ 378 (400-1 ¾)	NA	
CIRCLING	1640-1	557 (600-1)	1820-2 737 (800-2)	NA	

NC-1, 22 FEB 2024 to 21 MAR 2024

NC-1, 22 FEB 2024 to 21 MAR 2024