

WAAS

CH **86502**

W11A

APP CRS

107°

Rwy Idg

4001

TDZE

145

Apt Elev

146

RNAV (GPS) RWY 11


WINTER HAVEN RGNL (GIF')

RNP APCH-GPS.

▼ Rwy 11 helicopter visibility reduction below 1 SM NA. Baro-VNAV NA when using Bartow altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 3°C or above 54°C. When local altimeter setting not received, use Bartow altimeter setting and increase LPV DA to 415 feet; increase LNAV/VNAV DA to 667 feet and all visibilities ½ SM; increase all MDAs 20 feet. Straight-in Rwy 11 NA at night, Circling Rwy 5, 11, 29 NA at night.

MISSED APPROACH:
Climb to 2600 direct RAVYO and hold.

ASOS 133.675	TAMPA APP CON 120.65 290.3	CLNC DEL (GCO) 121.725	UNICOM 123.05 (CTAF) 0
------------------------	--------------------------------------	----------------------------------	----------------------------------

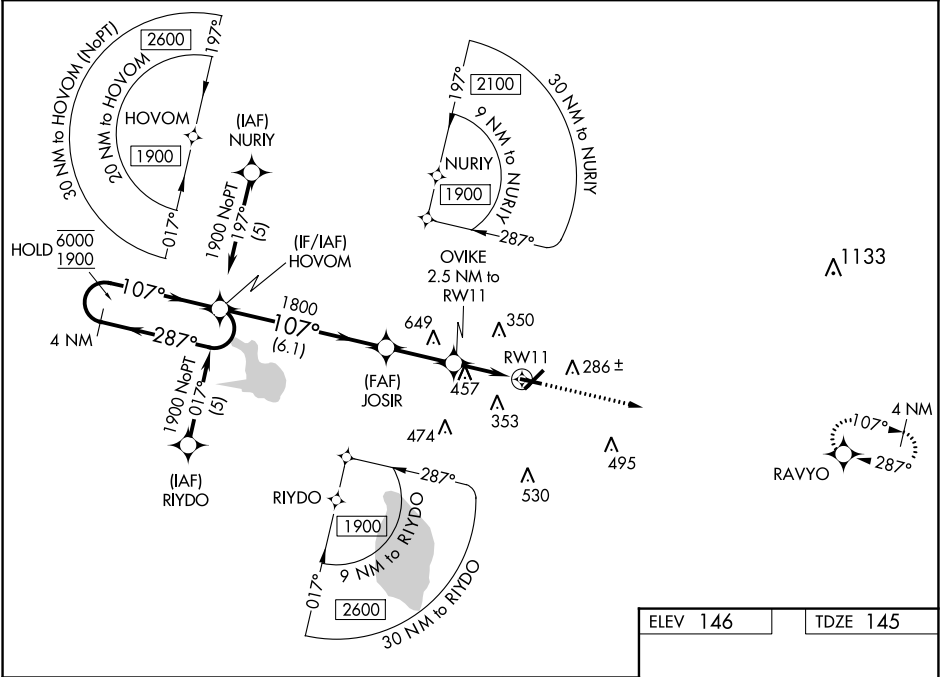

4 NM Holding Pattern		HOVOM	JOSIR	OVIKE	2.5 NM to RW11	2600	RAVYO
6000 1900		287° 107°	1800	980	RW11		
GP 3.00° TCH 45							
		6.1 NM	2.5 NM	2.5 NM			
CATEGORY	A	B	C	D			
LPV DA	395-1 250 (300-1)						
LNAV/VNAV DA	647-1⅜ 502 (600-1⅜)						
LNAV MDA	760-1	615 (700-1)	760-1¼	615 (700-1¼)			
CIRCLING	760-1	614 (700-1)	820-2 674 (700-2)	960-2¾ 814 (900-2¾)			

REIL Rwy 5 and 23

REIL Rwy 11 and 29 0

MIRL Rwy 5-23 and 11-29 0