

WAAS CH 53719	APP CRS 022°	Rwy Idg TDZE	4400 1068
W02A		Apt Elev	1068

RNAV (GPS) RWY 2


GRIMES FLD (I74)

RNP APCH.



▼ Baro-VNAV and VDP NA when using Springfield altimeter setting. Rwy 2 helicopter visibility reduction below 3/4 SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use Springfield altimeter setting and increase all DAs 44 feet, all MDAs 60 feet, increase LNAV/VNAV all Cats visibility 1/4 SM, and increase Circling Cat C visibility 1/4 SM. Circling NA to Rwy 1 and 19.

MISSED APPROACH:
Climb to 3000 direct
HIRID and hold.

AWOS-3 118,325	COLUMBUS APP CON 118,425 294,5	UNICOM 122.7 (CTAF) 0
--------------------------	--	---------------------------------

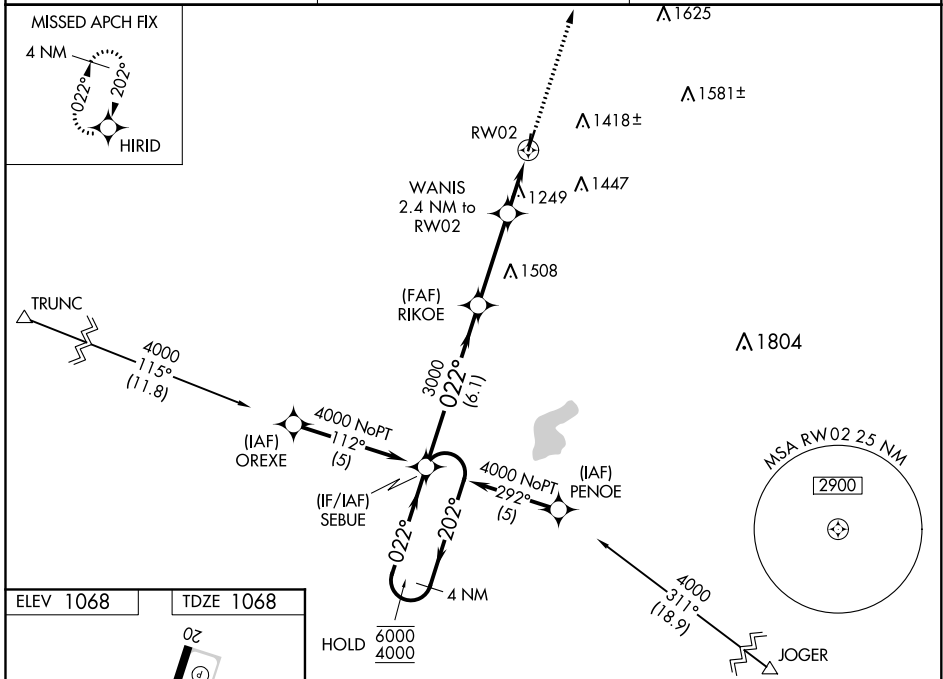

ELEV 1068	TDZE 1068
-----------	-----------

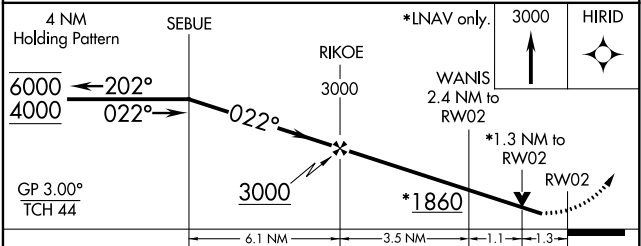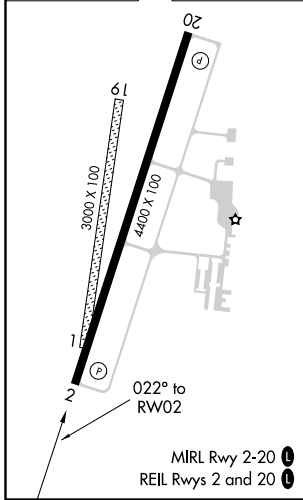

CATEGORY	A	B	C	D
LPV DA	1318-1		250 (300-1)	NA
LNAV/VNAV DA	1501-1½		433 (500-1½)	NA
LNAV MDA	1500-1	432 (500-1)	1500-1¼ 432 (500-1¼)	NA
C CIRCLING	1580-1 512 (600-1)	1780-1 712 (800-1)	1800-2 732 (800-2)	NA

EC-2, 16 JUN 2022 to 14 JUL 2022

EC-2, 16 JUN 2022 to 14 JUL 2022

WAAS CH 78419 W20A	APP CRS 202°	Rwy Idg TDZE 1068 Apt Elev 1068	4400 1068 1068
--	------------------------	---	---

RNAV (GPS) RWY 20



GRIMES FLD (I74)

RNP APCH.

⚠ Baro-VNAV NA when using Springfield altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). Rwy 20 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Springfield altimeter setting and increase all DAs 44 feet, all MDAs 60 feet, increase LPV all Cats and LNAV Cat C visibility ¼ SM, and increase Circling Cat C visibility ¼ SM. VDP NA with Springfield altimeter setting. Circling NA to Rwy's 1 and 19.

MISSED APPROACH: Climb to 4000 direct SEBUE and hold.

AWOS-3 118.325	COLUMBUS APP CON 118.425 294.5	UNICOM 122.7 (CTAF) 0
--------------------------	--	---------------------------------

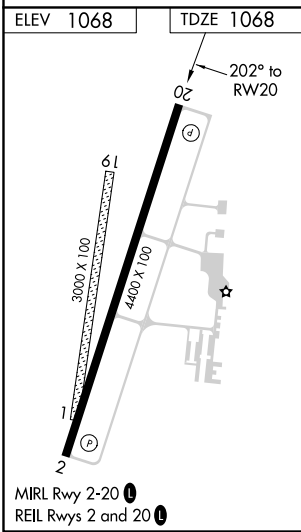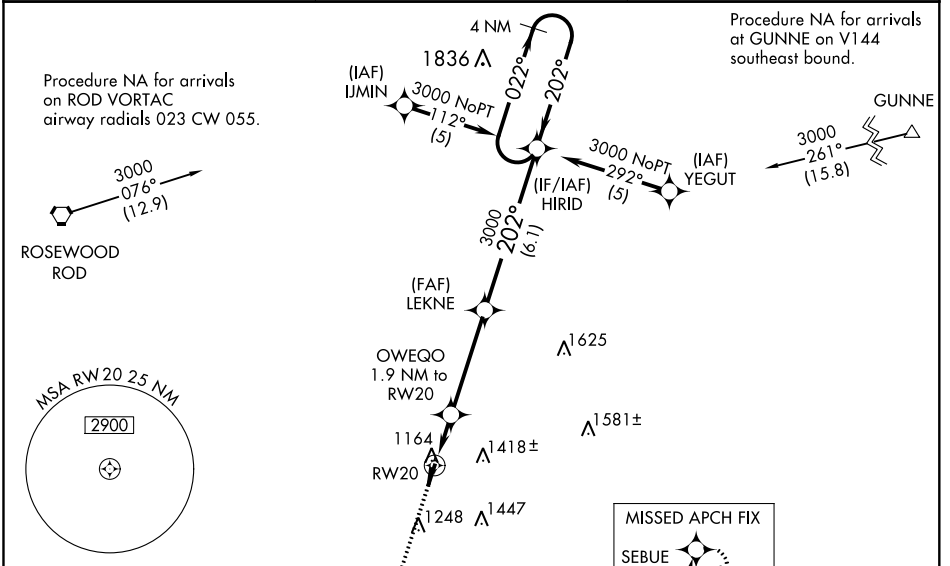

4000	SEBUE	OWEQO 1.9 NM to RW20	LEKNE 3000	HIRID	4 NM Holding Pattern
*LNAV only.	*1 NM to RW20	*1700	3000	3000	GP 3.00° TCH 38
1 NM	0.9 NM	4 NM	6.1 NM		
CATEGORY	A	B	C	D	
LPV DA	1347-1	279 (300-1)			NA
LNAV/VNAV DA	1469-1½	401 (500-1½)			NA
LNAV MDA	1420-1	352 (400-1)			NA
C CIRCLING	1580-1 512 (600-1)	1780-1 712 (800-1)	1800-2 732 (800-2)		NA




EC-2, 16 JUN 2022 to 14 JUL 2022

EC-2, 16 JUN 2022 to 14 JUL 2022

VORTAC ROD 117.5 Chan 122	APP CRS 130°	Rwy Idg TDZE Apt Elev N/A N/A 1068
---	------------------------	--

VOR-A
GRIMES FLD (I74)

DME required.		MISSED APPROACH: Climb to 2800 then climbing left turn to 3000 direct ROD VORTAC and hold.
<p>▼ Circling NA to Rwy 1 and 19. When local altimeter setting not received, use Springfield altimeter setting and increase all MDAs 60 feet and Cat C visibility ¼ SM.</p>		
AWOS-3 118,325	COLUMBUS APP CON 118.425 294.5	UNICOM 122.7 (CTAF) ①

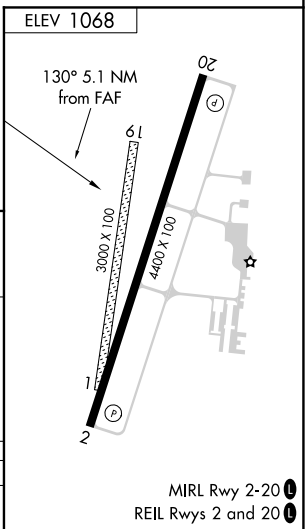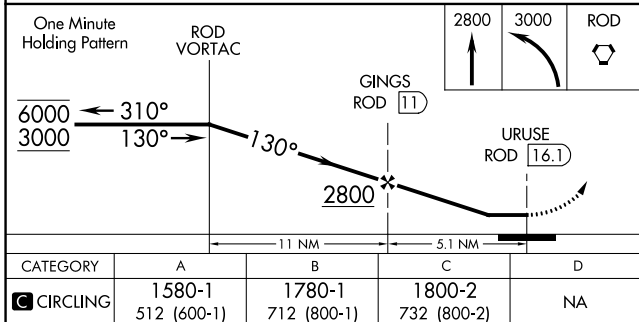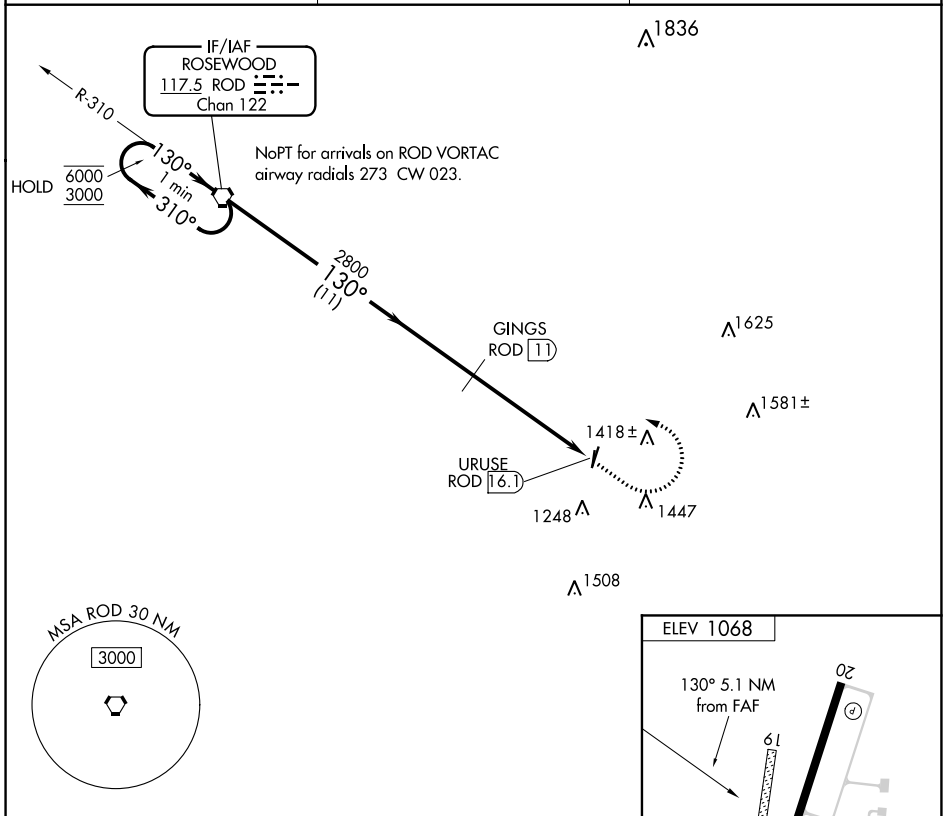

EC-2, 16 JUN 2022 to 14 JUL 2022

EC-2, 16 JUN 2022 to 14 JUL 2022