

WAAS CH 58200 W12A	APP CRS 123°	Rwy Idg 10201 TDZE 1359 Apt Elev 1384
--	------------------------	--

RNAV (GPS) RWY 12C

PHOENIX-MESA GATEWAY (IWA)


▼

▲


DME/DME RNP-0.3 NA.
For uncompensated Baro-VNAV systems LNAV/VNAV NA below -17°C (2°F) or above 46°C (115°F).

MISSED APPROACH: Climb to 5000 direct PADPE and on 213° track to RIYCO and hold.

ATIS★ 133.5 270.275	PHOENIX APP CON 124.9 353.8	GATEWAY TOWER★ 120.6 (CTAF) 289.4	GND CON 128.25 275.8	CLNC DEL 135.05
-------------------------------	---------------------------------------	---	--------------------------------	---------------------------

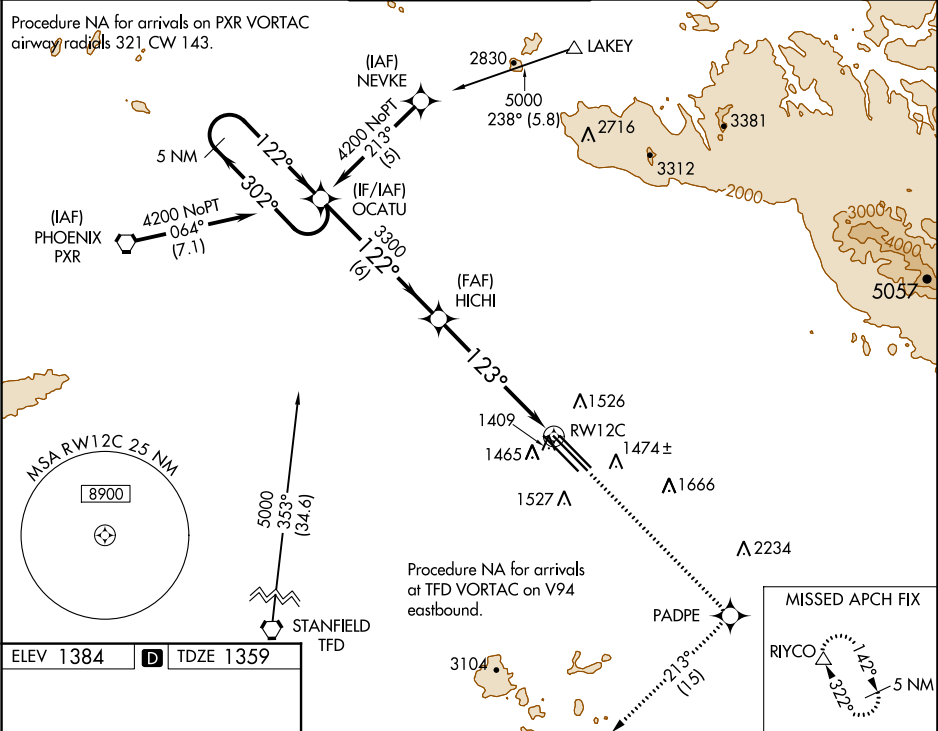

ELEV 1384	D	TDZE 1359
-----------	---	-----------



MIRL Rwy 12R-30L
HIRL Rwy 12L-30R and 12C-30C
REIL Rwy 12L and 30R

5 NM Holding Pattern		OCATU	5000	PADPE	213° tr	RIYCO
4200 ← 302°		122° →	122°	3300	*1.1 NM to RW12C	
GP 3.00°		TCH 50	3300	123°	RW12C	
		6 NM	4.8 NM	1.1		
CATEGORY	A	B	C	D	E	
LPV DA	1609-1 250 (300-1)					
LNAV/VNAV DA	1686-1¼ 327 (400-1¼)					
LNAV MDA	1740-1 381 (400-1)			1740-1¼ 381 (400-1¼)		
CIRCLING	1840-1¼	456 (500-1¼)	1880-1½ 496 (500-1½)	2000-2 616 (700-2)	2020-2¼ 636 (700-2¼)	