

WAAS CH <b>87013</b> <b>W18A</b>	APP CRS <b>177°</b>	Rwy ldg TDZE Apt Elev	<b>5500</b> <b>213</b> <b>213</b>
--	------------------------	-----------------------------	---

# RNAV (GPS) RWY 18


JASPER COUNTY/BELL FLD (JAS)

RNP APCH-GPS.

▼ Baro-VNAV NA when using De Ridder altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Rwy 18 helicopter visibility reduction below 3/4 SM NA. VDP NA when using De Ridder altimeter setting. When local altimeter setting not received, use De Ridder altimeter setting and increase LPV DA to 654 feet and all visibilities 3/8 SM. Increase LNAV/VNAV DA to 817 feet and all visibilities 3/8 SM. Increase all MDAs 100 feet and LNAV visibility Cat C 3/8 SM, and Circling visibility Cat C 1/2 SM.


MISSED APPROACH:  
Climb to 3000  
direct BRIR and hold.

AWOS-3 <b>118.375</b>	HOUSTON CENTER <b>126.95 363.05</b>	UNICOM <b>122.8</b> (CTAF) <b>0</b>
--------------------------	--	--

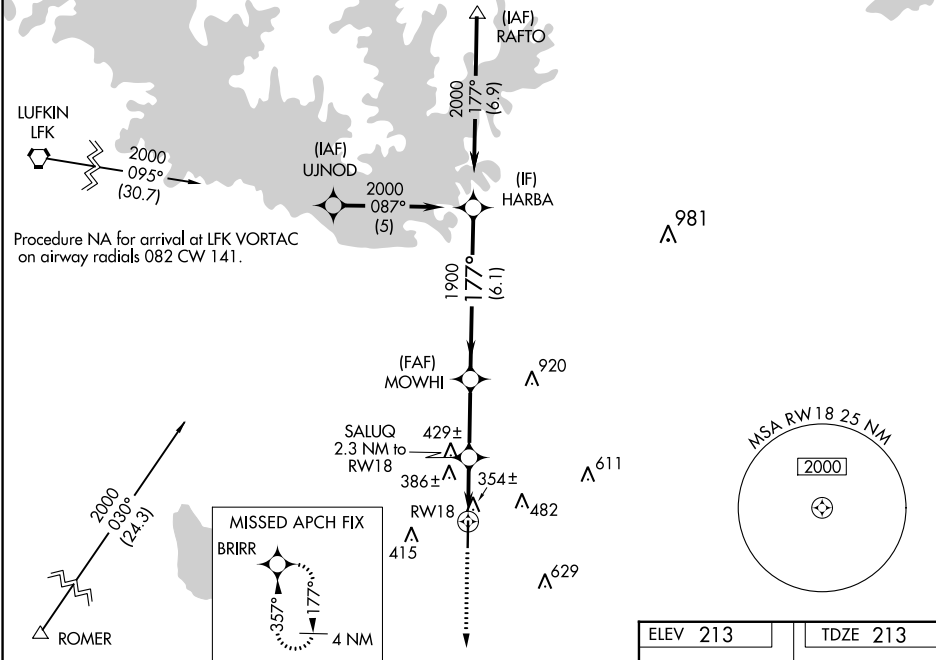

SC-5, 22 FEB 2024 to 21 MAR 2024

SC-5, 22 FEB 2024 to 21 MAR 2024

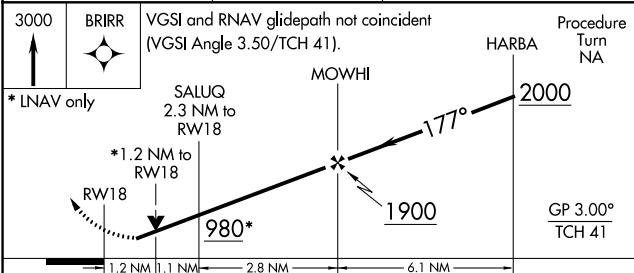

ELEV 213	TDZE 213
----------	----------

CATEGORY	A	B	C	D
LPV DA	567-1	354 (400-1)		NA
LNAV/VNAV DA	730-1 3/8	517 (600-1 3/8)		NA
LNAV MDA	700-1 487 (500-1)	700-1 3/8 487 (500-1 3/8)		NA
CIRCLING	740-1 527 (600-1)	800-1 1/2 587 (600-1 1/2)		NA

