
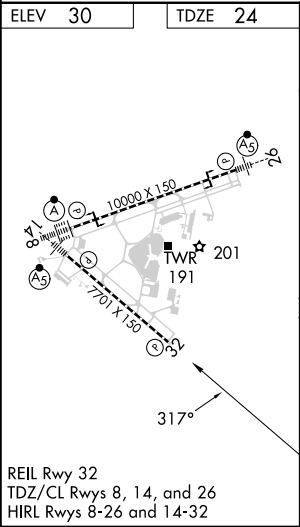


WAAS CH 40199 W32A	APP CRS 317°	Rwy Idg TDZE 24 Apt Elev 30	7701
--	------------------------	---	-------------

RNAV (GPS) Z RWY 32

JACKSONVILLE INTL (JAX)

▼ For uncompensated Baro-VNAV systems, procedure NA below -5°C (23°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA.			MISSED APPROACH: Climb to 2000 direct OSBAJ and hold.		
D-ATIS 125.85	JACKSONVILLE APP CON 119.0 269.9	JACKSONVILLE TOWER 118.3 317.7	GND CON 121.9 348.6	CLNC DEL 119.5 290.275	CPDLC

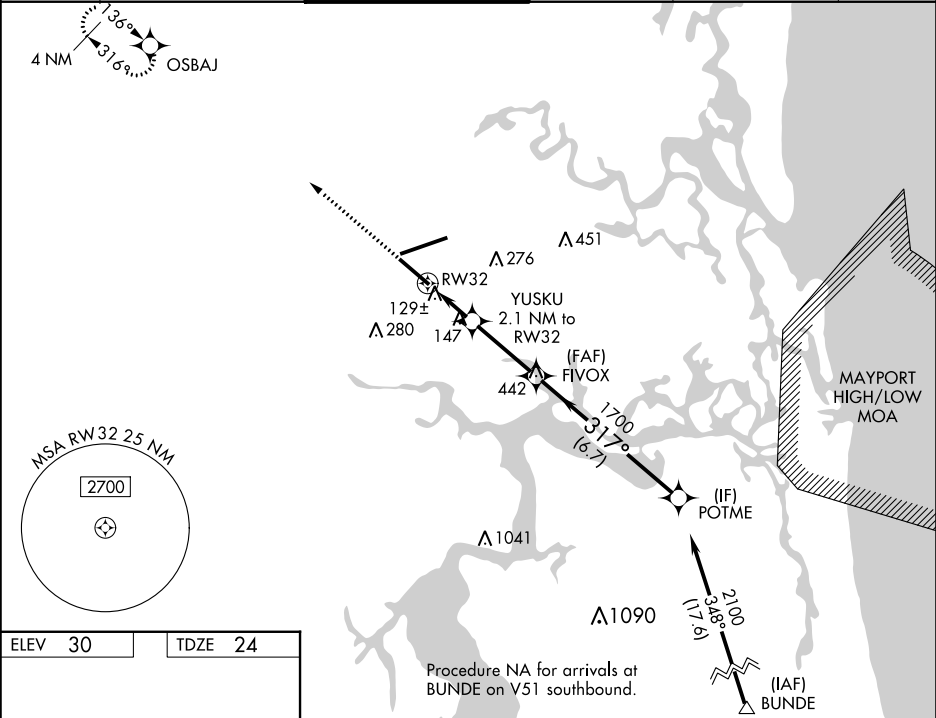

2000 OSBAJ		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 67).		POTME
*LNAV only.		YUSKU 2.1 NM to RW32		FIVOX 1700
RW32		1 NM to RW32		POTME 2100
1 NM		1.1 NM		3 NM
CATEGORY	A	B	C	D
LPV DA	336-1 312 (400-1)			
LNAV/VNAV DA	387-1¼ 363 (400-1¼)			
LNAV MDA	400-1 376 (400-1)			
CIRCLING	520-1 490 (500-1)		580-1½ 550 (600-1½)	640-2 610 (700-2)