

WAAS CH 99519 W16A	APP CRS 156°	Rwy Idg 4701 TDZE 2384 Apt Elev 2384
--	------------------------	---


RNAV (GPS) RWY 16
NORTON MUNI (NRN)

RNP APCH - GPS.


Baro-VNAV NA when using Hill City Muni altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. When local altimeter not received, use Hill City Muni altimeter setting and increase LPV DA to 2720 feet, LNAV/VNAV DA to 2742 feet, all MDA 100 feet, LNAV Cat C visibility ¼ SM, Circling Cat C visibility ½ SM.

MISSED APPROACH:
Climb to 4300 direct CEYAL and hold.

AWOS-3 118.275	DENVER CENTER 132.7 226.675	CTAF 122.9
--------------------------	---------------------------------------	----------------------

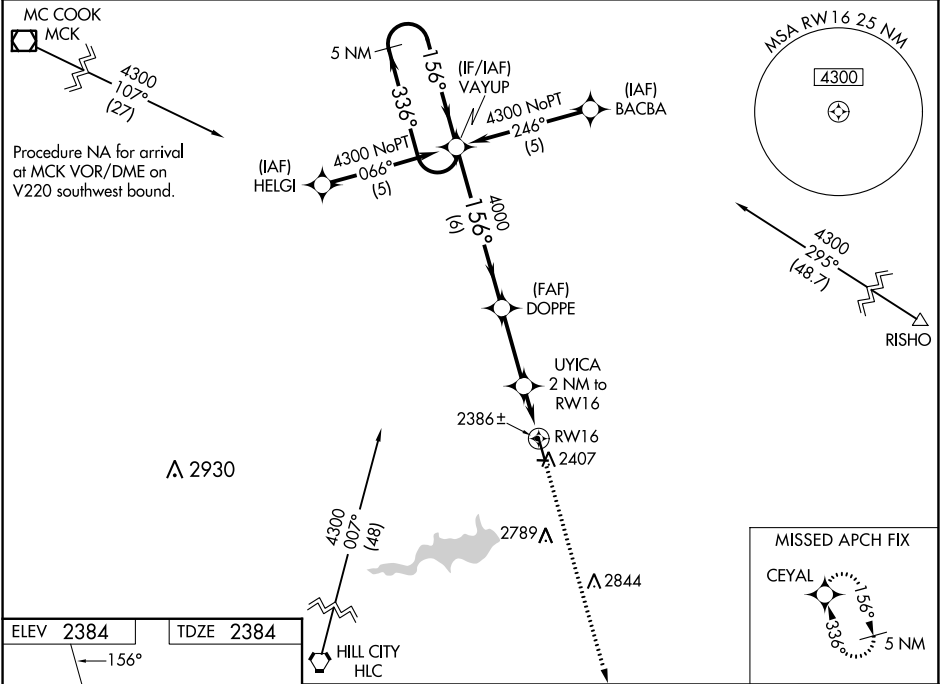

ELEV 2384	TDZE 2384
------------------	------------------

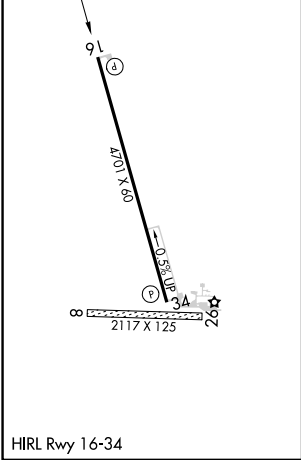

5 NM Holding Pattern VAYUP				4300	CEYAL
GP 3.00° TCH 45				4000	3040
				6 NM	2.9 NM
CATEGORY	A	B	C	D	
LPV DA	2634-1 250 (300-1)			NA	
LNAV/VNAV DA	2656-1 272 (300-1)			NA	
LNAV MDA	2840-1	456 (500-1)	2840-1 456 (500-1 3/8)	NA	
CIRCLING	2880-1	496 (500-1)	3100-2 716 (800-2)	NA	

WAAS CH 70619 W34A	APP CRS 336°	Rwy Idg 4701 TDZE 2376 Apt Elev 2384
--	------------------------	---

RNAV (GPS) RWY 34

NORTON MUNI (N.R.N)

RNP APCH-GPS.	MISSED APPROACH: Climb to 4300 direct VAYUP and hold.
Circling NA to Rwys 8 and 26. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. LNAV and Circling minimums NA when using Hill City altimeter setting.	

AWOS-3PT 118.275	DENVER CENTER 132.7 226.675	CTAF 122.9
----------------------------	---------------------------------------	----------------------

