


|                                        |                        |                                                                |
|----------------------------------------|------------------------|----------------------------------------------------------------|
| WAAS<br>CH <b>90407</b><br><b>W26B</b> | APP CRS<br><b>258°</b> | Rwy Idg <b>10200</b><br>TDZE <b>926</b><br>Apt Elev <b>944</b> |
|----------------------------------------|------------------------|----------------------------------------------------------------|

RNAV (GPS) Y RWY 26L  
ONTARIO INTL (ONT)

|                                                                                                                                                                                 |                              |                                |                                                                                             |                                                                                                                                         |       |  |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|--------------------------------|---------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|-------|--|
| RNP APCH - GPS.                                                                                                                                                                 |                              |                                | ALSf-2<br> | MISSED APPROACH: Climb to 4700 direct HERZO and on track 170° to MAHOY and on track 083° to PDZ VORTAC, continue climb in hold to 4700. |       |  |
| T Circling NA north of Rwy 8L-26R. For uncompensated Baro-VNAV systems, procedure NA below 2°C or above 54°C. For inop ALS, increase all Cats LNAV/VNAV visibility to RVR 5500. |                              |                                |                                                                                             |                                                                                                                                         |       |  |
| D-ATIS<br>124.25                                                                                                                                                                | SOCAL APP CON<br>127.0 318.2 | ONTARIO TOWER<br>120.6 360.775 | GND CON<br>121.9 257.8                                                                      | CLNC DEL<br>118.1                                                                                                                       | CPDLC |  |

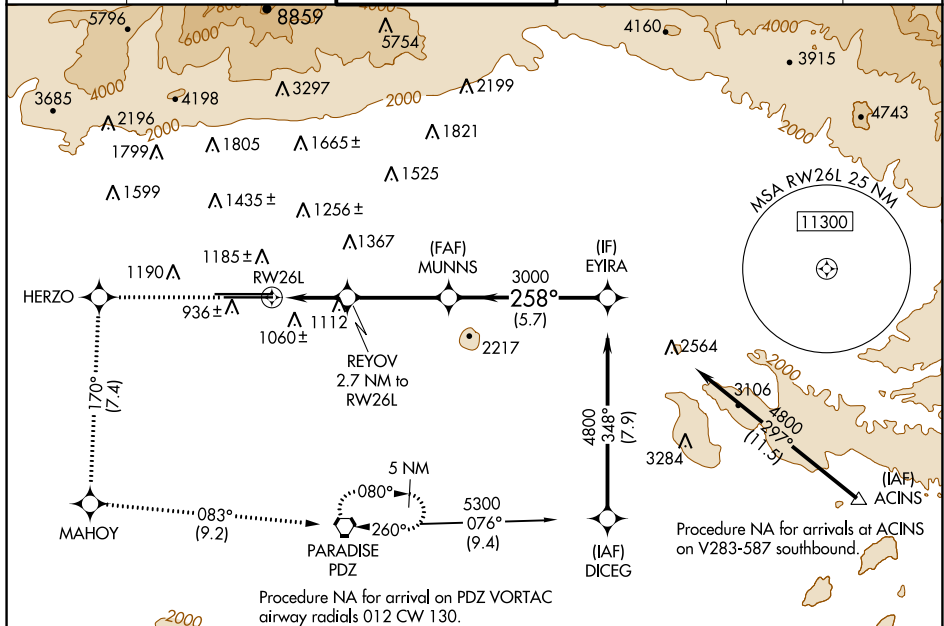

|          |          |          |
|----------|----------|----------|
| ELEV 944 | <b>D</b> | TDZE 926 |
|----------|----------|----------|

