

WAAS CH 86299 W25A	APP CRS 256°	Rwy Idg TDZE 44 Apt Elev 45
--	------------------------	---

RNAV (GPS) RWY 25

OXNARD (OXR)


RNP APCH-GPS.

Inoperative table does not apply. Baro-VNAV NA when using Camarillo altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 43°C. When local altimeter setting not received, use Camarillo altimeter setting and increase LPV DA to 312 feet, increase LNAV/VNAV DA to 351 feet; increase all MDAs 20 feet and Circling Cat C visibility ¼ SM.

MALSF

MISSED APPROACH: Climb to 2000 direct PEWKI and on track 239° to SQUID and hold.

ATIS 118.05	POINT MUGU APP CON* 124.7 335.5	OXNARD TOWER* 134.95 (CTAF) 0 257.8	GND CON 121.9
-----------------------	---	---	-------------------------

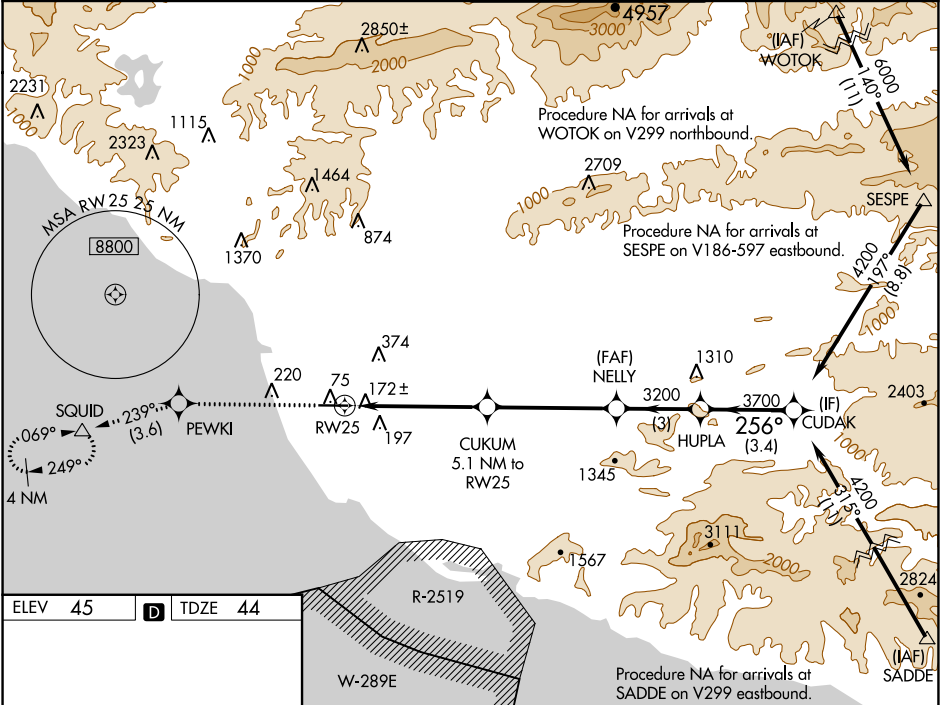

ELEV 45	D	TDZE 44
2000 PEWKI tr 239° SQUID *LNAV only RW25 CUKUM 5.1 NM to RW25 NELLY 3200 HUPLA 3700 CUDAK 256° 4200 GP 3.00° TCH 58		
5953 X 100 TWR 117 112 256°		
REIL Rwy 7	MIRL Rwy 7-25	
CATEGORY	A	B C D
LPV DA	294-1	250 (300-1)
LNAV/VNAV DA	333-1	289 (300-1)
LNAV MDA	520-1 476 (500-1)	520-1 476 (500-1)
CIRCLING	520-1 475 (500-1)	700-1 760-2 655 (700-1) 715 (800-2)