RNAV (GPS) RWY 1

BEECH RIVER RGNL (PVE)

WAAS	APP CRS		
CH **90116**	**013°**	Rwy Idg	**6000**
W01A		TDZE	**467**
		Apt Elev	**488**

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5° F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Jackson altimeter setting: increase LPV all Cats DA to 807 and all Cats visibility ⅜ mile; increase LNAV/VNAV all Cats DA to 911 and all Cats visibility ⅜ mile; increase all MDA 100 feet and LNAV Cats C/D and Circling Cat C visibility ¼ mile and Circling Cat D visibility ½ mile. Baro-VNAV and VDP NA when using Jackson altimeter setting.

MISSED APPROACH: Climb to 3000 direct EYODI and hold.

AWOS-3	MEMPHIS CENTER	UNICOM
118.125	**125.85 379.25**	**123.0** (CTAF) L

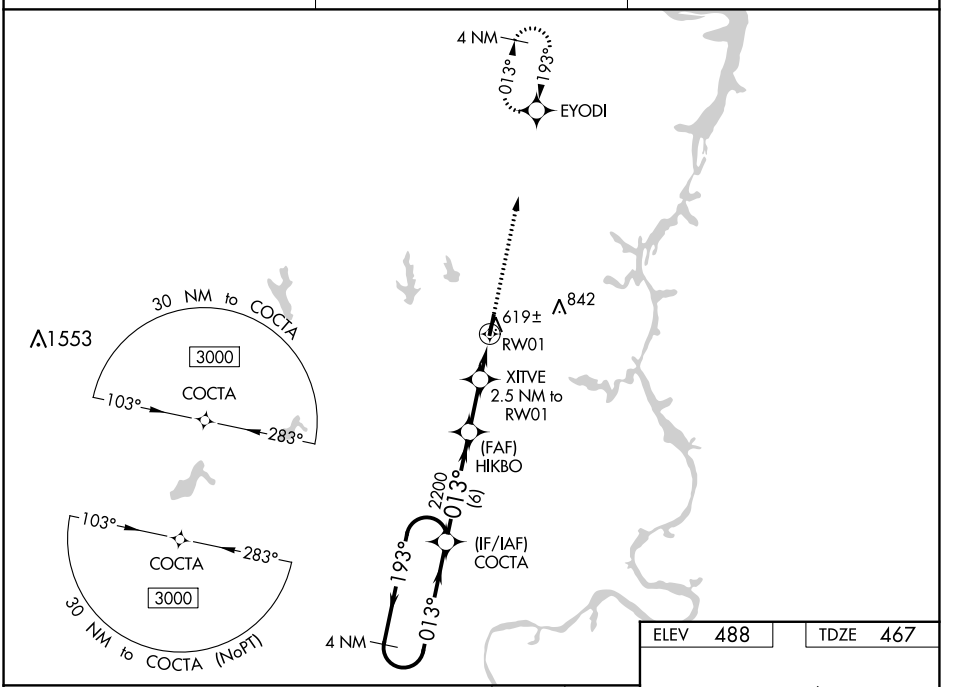

VGSI and RNAV glidepath not coincident (VGSI Angle 3.09/TCH 32).

3000 EYODI

* LNAV only

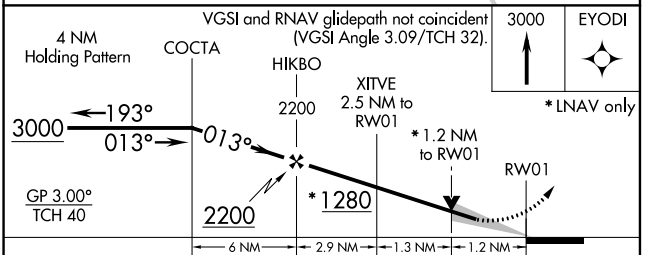

CATEGORY	A	B	C	D
LPV DA	717-⅞ 250 (300-⅞)			
LNAV/VNAV DA	821-1¼ 354 (400-1¼)			
LNAV MDA	880-1 413 (400-1)		880-1⅛ 413 (400-1⅛)	
C CIRCLING	940-1 452 (500-1)	980-1 492 (500-1)	1000-1½ 512 (600-1½)	1200-2¼ 712 (800-2¼)

ELEV 488 TDZE 467

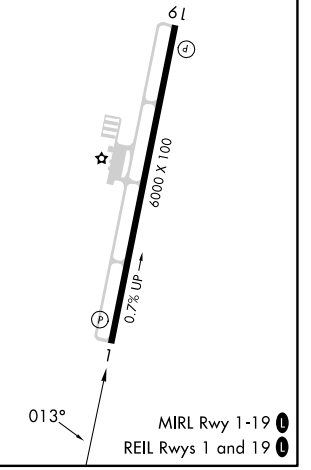

SE-1, 22 FEB 2024 to 21 MAR 2024
SE-1, 22 FEB 2024 to 21 MAR 2024