

SAN ANTONIO, TEXAS

AL-369 (FAA)

24025

APP CRS	Rwy Idg	8502
128°	TDZE	809
	Apt Elev	809

RNAV (RNP) Z RWY 13R
SAN ANTONIO INTL (SAT)

RNP AR APCH - GPS

T For uncompensated Baro-VNAV systems, procedure NA below -5°C or above 54°C. For inop ALS, increase RNP 0.3 all Cats visibility to RVR 6000.

ALSF-2



MISSED APPROACH: (Do not exceed 210K until POYIG) Climb to 3100 on track 128° to POYIG and track 171° to EMBOW and hold.

D-ATIS
118.9


SAN ANTONIO APP CON
125.1 307.0

N ANTONIO TOWER
1198 2578


GND CON
121.9 348.6

CLNC DEL
126.7

CPDLC

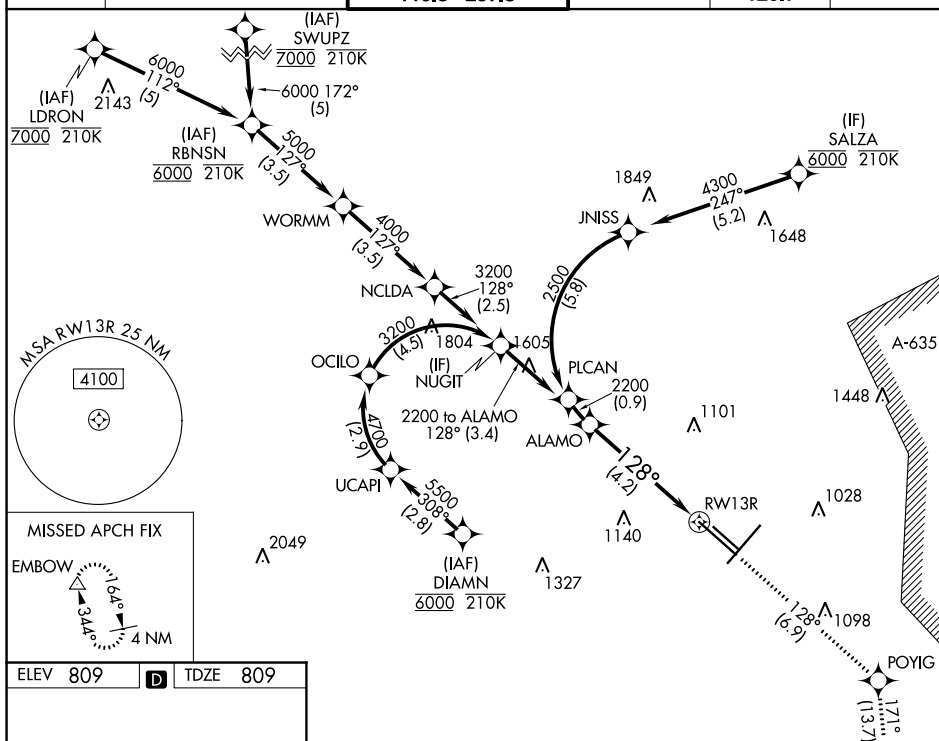


ELEV	809		TDZE	809
------	-----	---	------	-----



TDZ/CL Rwy 13R
REIL Rwy 13L, 22 and 31R
HIRL Rwy 4-22 and 13R-31L
MIRL Rwy 13L-31R

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00/TCH 75).

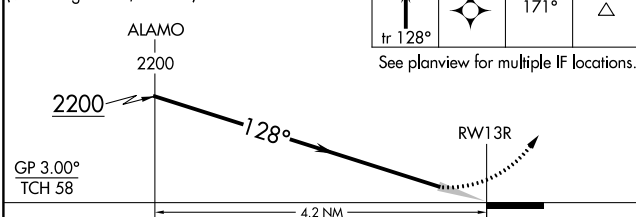

CATEGORY	A	B	C	D
RNP 0.15 DA		1137/26	328 (400-½)	
RNP 0.30 DA		1218/40	409 (500-¾)	

AUTHORIZATION REQUIRED

SAN ANTONIO, TEXAS

Amdt 1 25JAN24

SAN ANTONIO INTL (SAT)

29°32'N-98°28'W

RNAV (RNP) Z RWY 13R

SC-3, 22 FEB 2024 to 21 MAR 2024