
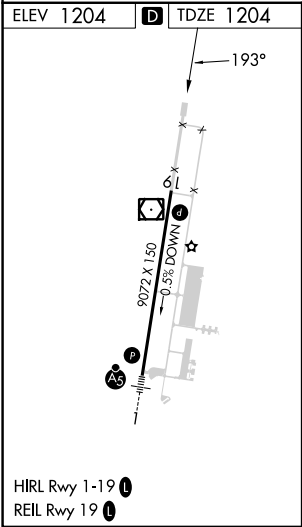


WAAS CH 86616 W19A	APP CRS 193°	Rwy Idg TDZE Apt Elev	9072 1204 1204
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 19
MARQUETTE/SAWYER RGNL (SAW)

RNP APCH. ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C.		MISSED APPROACH: Climb to 3500 direct EVYIP and hold.		
AWOS-3PT 118.375	MINNEAPOLIS CENTER 119.1 290.2	SAWYER TOWER ★ 119.975 (CTAF) ①	GND CON 121.65	UNICOM 122.7

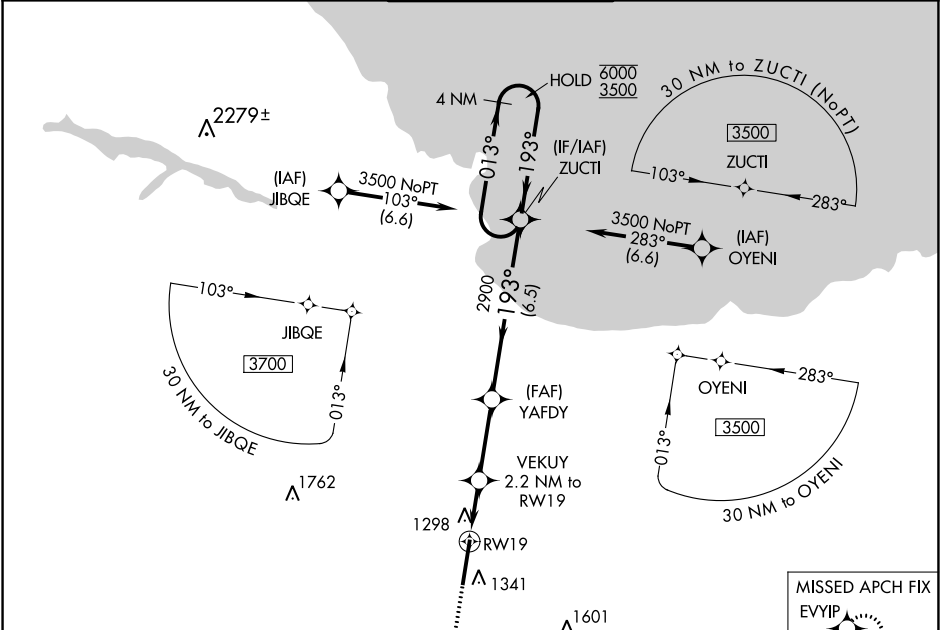

ELEV 1204 D TDZE 1204		3500 EVYIP		VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 53).		4 NM Holding Pattern	
* LNAV only		YAFDY		ZUCTI		013° → 6000	
RW19		VEKUY 2.2 NM to RW19		RW19		← 193° 3500	
1.6 NM		0.6 NM		2.9 NM		GP 3.00° TCH 60	
CATEGORY		A		B		C	
LPV DA		1404-3/4		200 (200-3/4)			
LNAV/VNAV DA		1521-7/8		317 (400-7/8)			
LNAV MDA		1620-1 416 (500-1)		1620-1 1/8 416 (500-1 1/8)			
CIRCLING		1680-1 476 (500-1)		1820-1 3/4 616 (700-1 3/4)		1820-2 616 (700-2)	