

WAAS CH 69311 W31A	APP CRS 313°	Rwy Idg 6304 TDZE 1114 Apt Elev 1119
--	------------------------	---

RNAV (GPS) RWY 31
THIEF RIVER FALLS RGNL (TVF)


V Baro-VNAV and VDP NA when using Crockston altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Crockston altimeter setting: increase LPV DA to 1446 feet and all visibilities $\frac{1}{8}$ SM; increase LNAV/VNAV DA to 1510 feet and all visibilities $\frac{3}{8}$ SM; increase all MDAs 100 feet and visibility Cats C and D $\frac{1}{4}$ SM. For inoperative MALSR, increase LNAV Cats C/D visibility to $\frac{1}{8}$ mile. For inoperative MALSR, when using Crockston altimeter setting, increase LPV all Cats visibility to $\frac{1}{8}$ mile, LNAV/VNAV all Cats visibility to $\frac{1}{4}$ mile, LNAV Cats C/D visibility to $\frac{1}{8}$ mile.

MALSR



MISSED APPROACH:
Climb to 2700 direct
WIMUS and hold.

AWOS-3PT 119.025	MINNEAPOLIS CENTER 132.15 269.6	UNICOM 122.8 (CTAF) 0
----------------------------	---	--

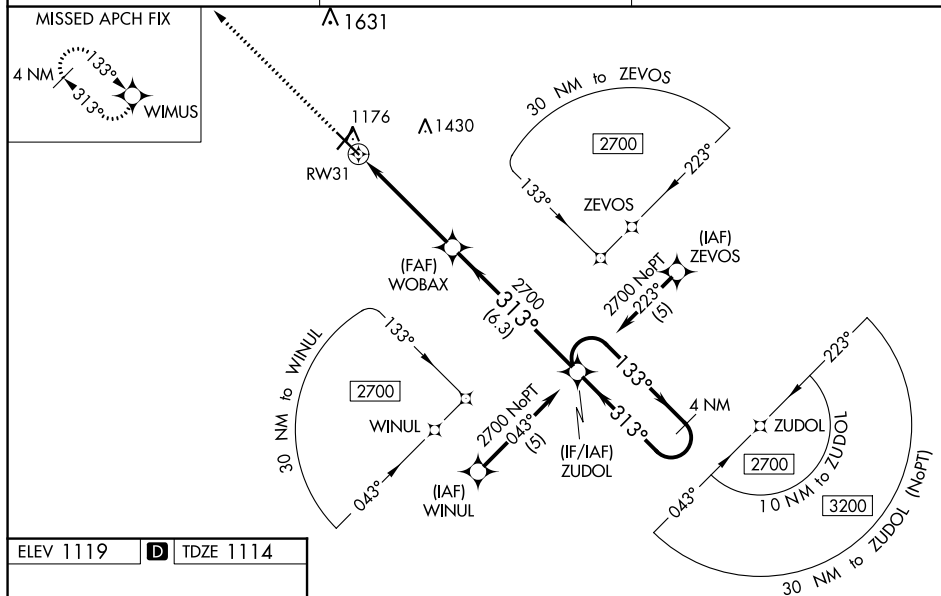

ELEV 1119	D	TDZE 1114
-----------	----------	-----------

