

LOC/DME I-RKS
109.3
Chan **30**

APP CRS
270°

Rwy Idg
TDZE
Apt Elev

10000
6765
6765

ILS or LOC RWY 27


SOUTHWEST WYOMING RGNL (RKS)

DME required.

MALSR

MISSED APPROACH: Climb to 7600 then climbing right turn to 9300 direct OCS VOR/DME and hold, continue climb-in-hold to 9300.


ASOS 118.375	SALT LAKE CENTER 124.35 353.5	UNICOM 122.8 (CTAF) 0
------------------------	---	---------------------------------

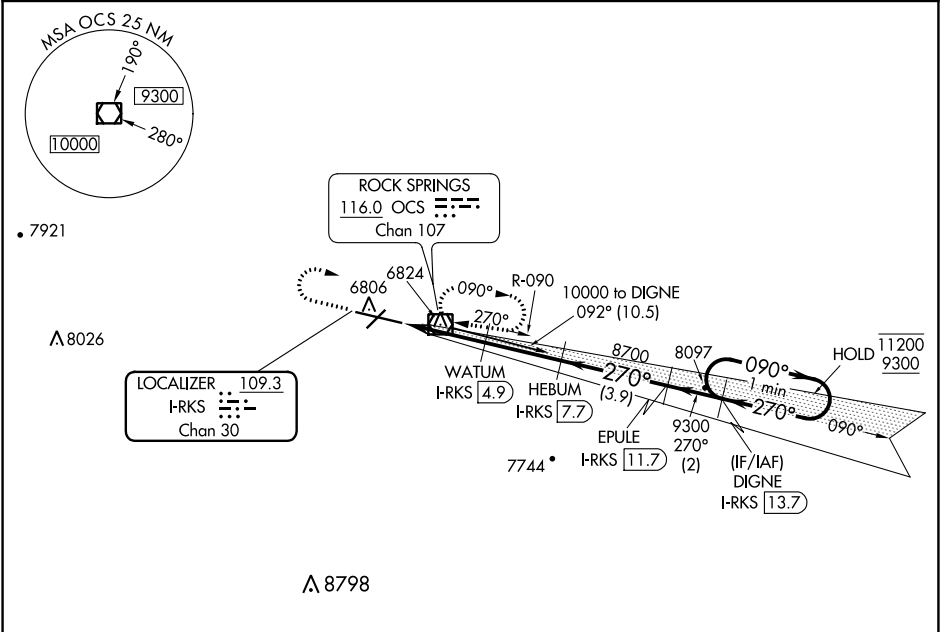

ELEV 6765

D

TDZE 6765

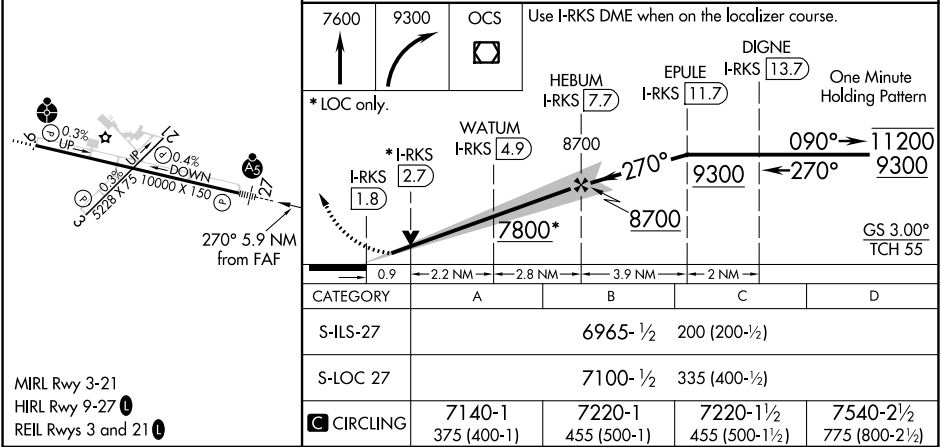

WAAS CH 49216 W27A	APP CRS 270°	Rwy Idg 10000 TDZE 6765 Apt Elev 6765
--	------------------------	--

RNAV (GPS) RWY 27

SOUTHWEST WYOMING RGNL (RKS)

RNP APCH.

▼

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -27°C or above 44°C. For inop ALS increase LNAV/VNAV all Cats visibility to ¾ SM.


MALSR

AS


MISSED APPROACH: Climb to 9800

direct REGVE and hold.

ASOS 118.375	SALT LAKE CENTER 124.35 353.5	UNICOM 122.8 (CTAF) 0
------------------------	---	---------------------------------

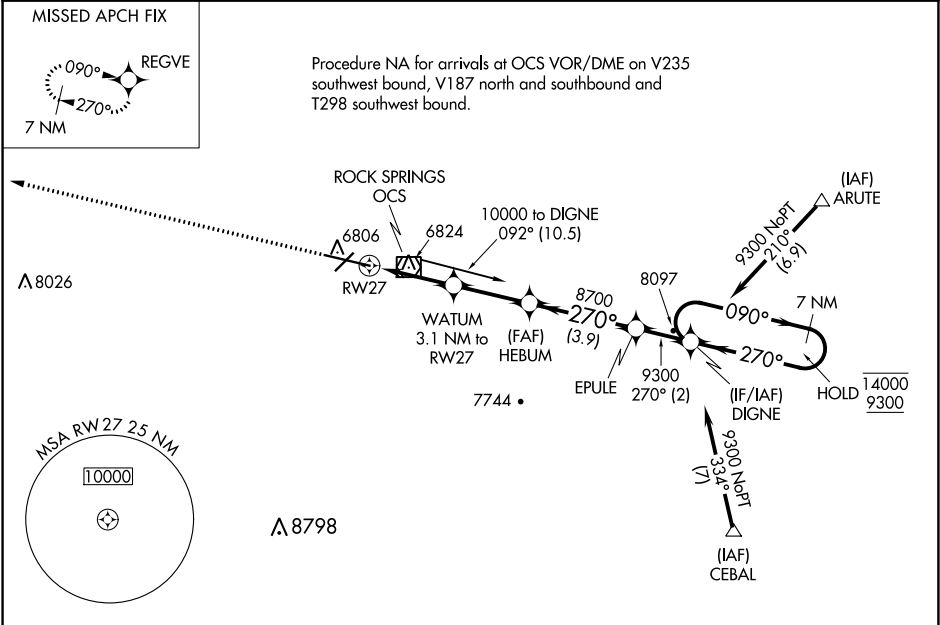

ELEV 6765	D	TDZE 6765
-----------	---	-----------



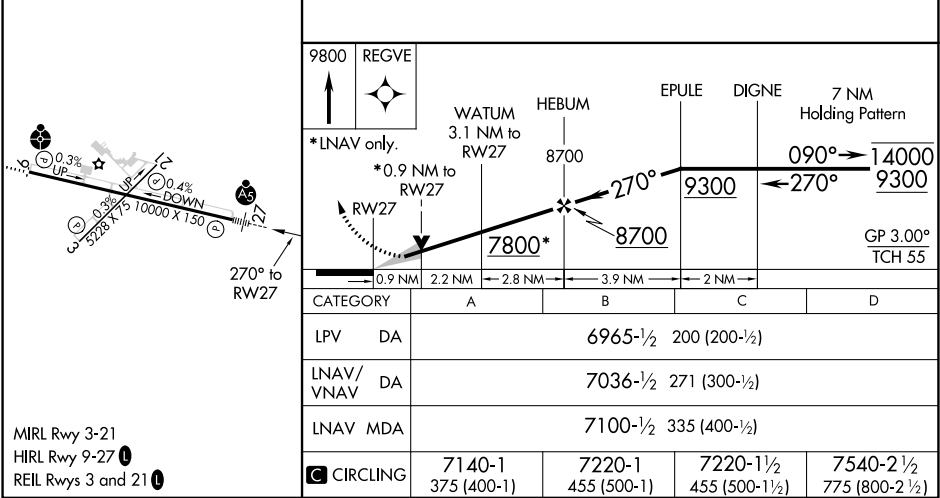


WAAS CH 66016 W09A	APP CRS 090°	Rwy Idg 10000 TDZE 6741 Apt Elev 6765
--	------------------------	--


RNAV (GPS) RWY 9
SOUTHWEST WYOMING RGNL (R.K.S)

RNP APCH.	ODALS	MISSED APPROACH: Climb to 9600 direct DIGNE and hold.
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA ▲ below -28°C or above 45°C .		

ASOS 118.375	SALT LAKE CENTER 124.35 353.5	UNICOM 122.8 (CTAF) 0
------------------------	---	---------------------------------

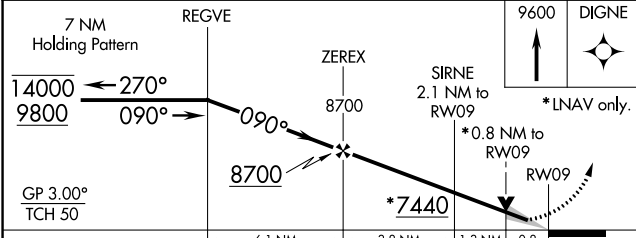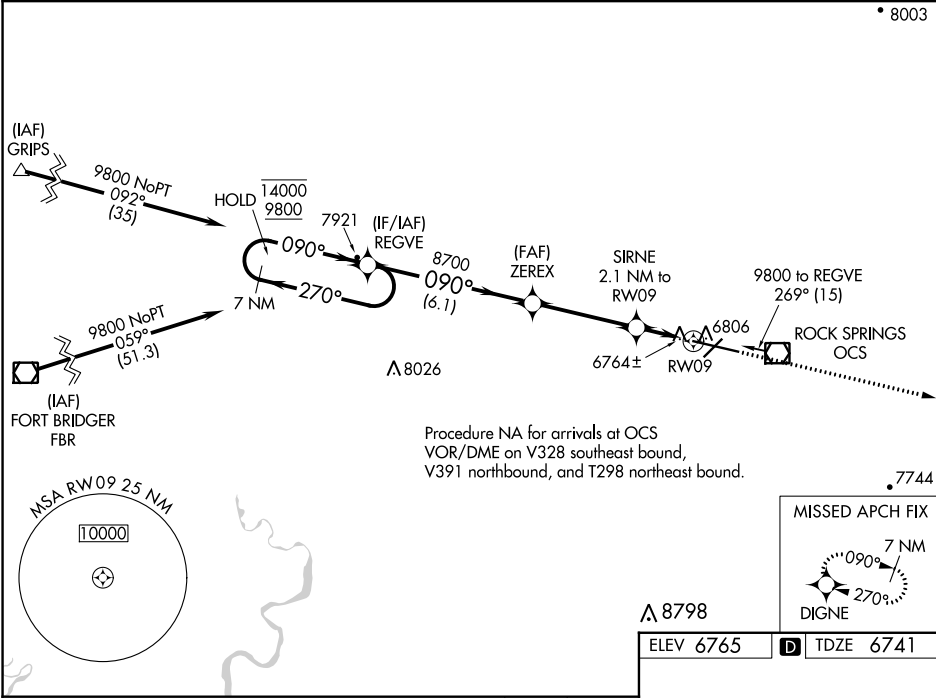

CATEGORY	A	B	C	D
LPV DA	6941-¾ 200 (200-¾)			
LNAV/VNAV DA	7034-¾ 293 (300-¾)			
LNAV MDA	7040-¾ 299 (300-¾)			7040-1 299 (300-1)
CIRCLING	7140-1 375 (400-1)	7220-1 455 (500-1)	7220-1½ 455 (500-1½)	7540-2½ 775 (800-2½)



NW-1, 22 FEB 2024 to 21 MAR 2024



NW-1, 22 FEB 2024 to 21 MAR 2024

VOR/DME OCS	APP CRS	Rwy Idg	10000
116.0	085°	TDZE	6741
Chan 107		Apt Elev	6765

VOR RWY 9
SOUTHWEST WYOMING RGNL (RKS)

DME required.	ODALS	MISSED APPROACH: Climb to 9300 direct OCS VOR/DME and hold, continue climb-in-hold to 9300.

ASOS 118.375	SALT LAKE CENTER 124.35 353.5	UNICOM 122.8 (CTAF) 0
-----------------	----------------------------------	--------------------------

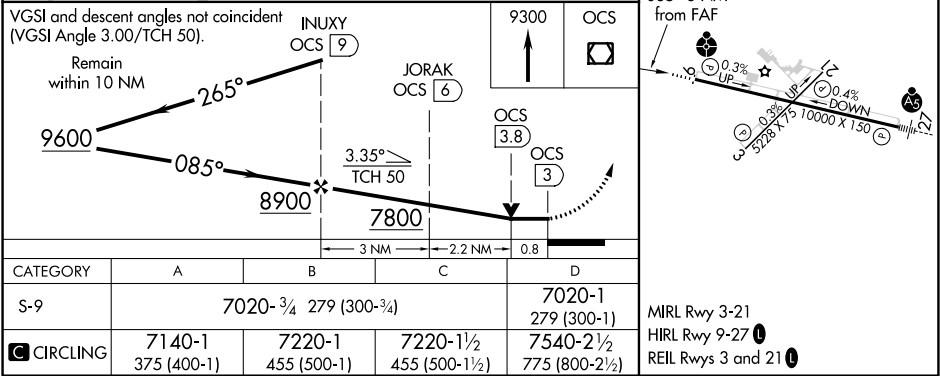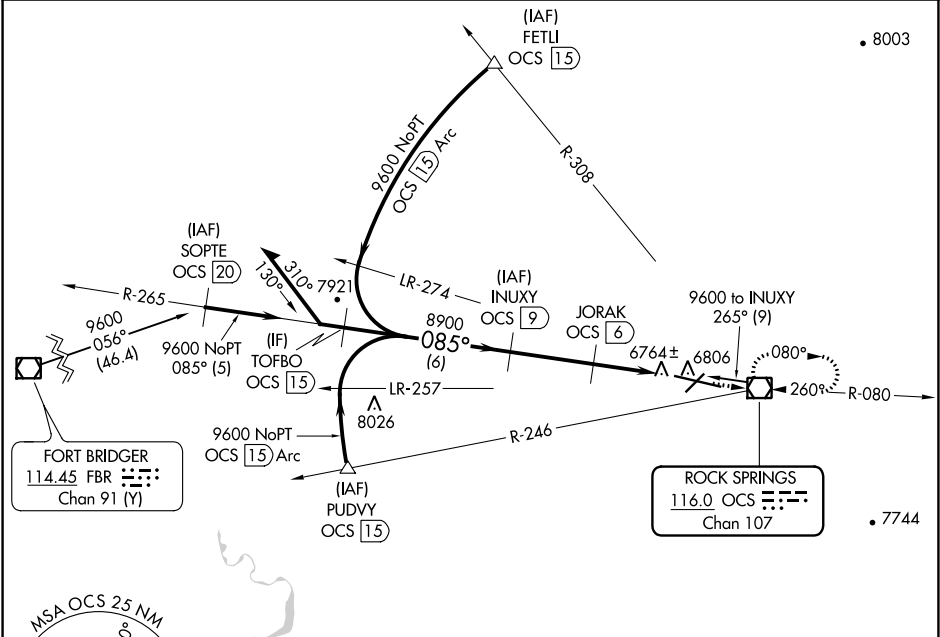

VOR/DME OCS 116.0 Chn 107	APP CRS 255°	Rwy Idg 10000 TDZE 6765 Apt Elev 6765
---	------------------------	--

VOR/DME RWY 27
SOUTHWEST WYOMING RGNL (RKS)




Inoperative table does not apply to Cat D.



MISSED APPROACH: Climb to 7700, then climbing right turn to 9100 direct OCS VOR/DME and hold.

ASOS 118.375	SALT LAKE CENTER 124.35 353.5	UNICOM 122.8 (CTAF) 0
------------------------	---	---------------------------------

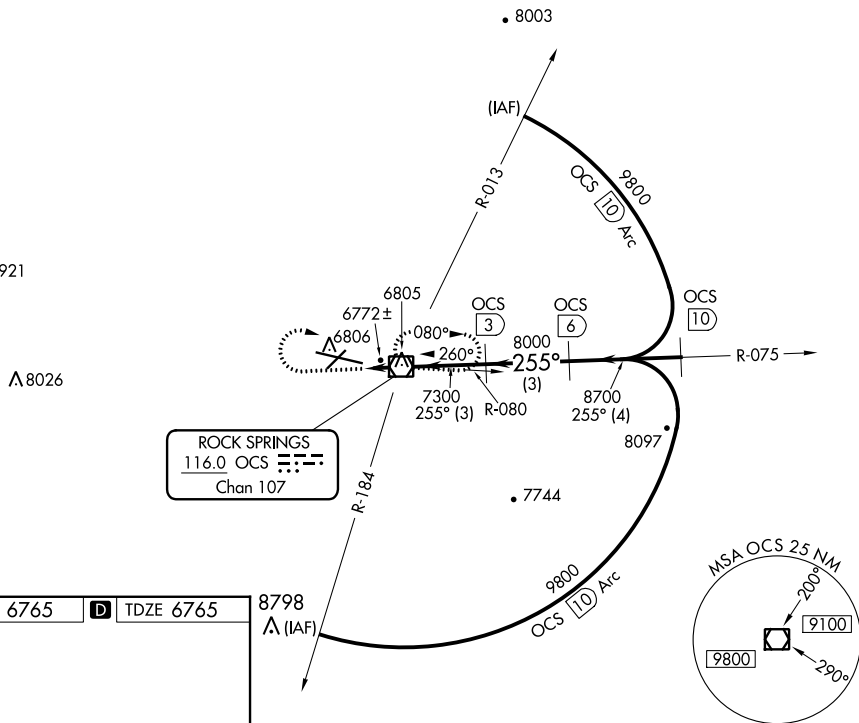

255° 1.4 NM from FAF

7700 9100 OCS

OCS 3 OCS 6 OCS 10

OCS VOR/DME

8700 9800

255°

Procedure Turn NA

1.4 NM 3 NM 3 NM 4 NM

CATEGORY	A	B	C	D
S-27	7040-1/2 275 (300-1/2)			7040-1 275 (300-1)
CIRCLING	7140-1 375 (400-1)	7220-1 455 (500-1)	7220-1 1/2 455 (500-1 1/2)	NA

MIRL Rwy 3-21
MIRL Rwy 9-27
REIL Rwy 3 and 21

SOUTHWEST WYOMING RGNL (RKS)
VOR/DME RWY 27