


NDB/DME GAM	APP CRS	Rwy Idg	4500
369	166°	TDZE	27
Chan 92 (114.5)		Apt Elev	27

NDB RWY 16


GAMBELL (GAM)(PAGM)

	Circling NA northeast of Rwy 16-34.	MISSED APPROACH: Climbing right turn to 3000 in GAM NDB/DME holding pattern.
---	-------------------------------------	--

AWOS-3P 125.9	ANCHORAGE CENTER 132.2 281.4	NOME RADIO 122.0	CTAF 122.7 0
------------------	---------------------------------	---------------------	-----------------

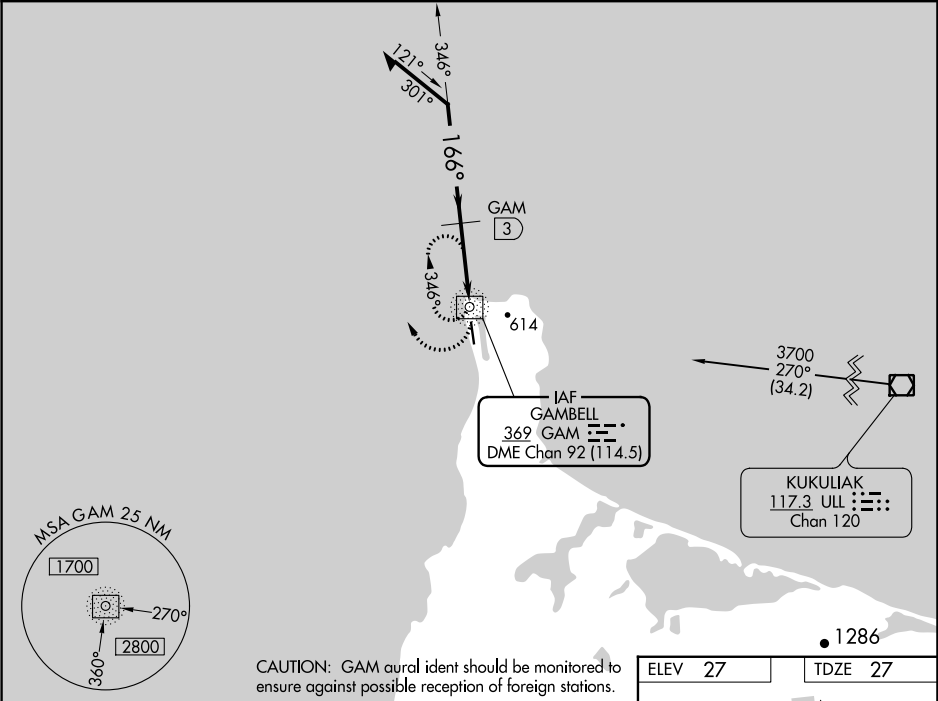

Remain within 10 NM		GAM NDB/DME		3000 GAM	
1800		346°		166°	
980		346°		3 NM	
		GAM 3		0.6	
CATEGORY	A	B	C	D	
S-16	980-1¼ 953 (1000-1¼)	980-1½ 953 (1000-1½)	980-3	953 (1000-3)	
CIRCLING	980-1¼ 953 (1000-1¼)	980-1½ 953 (1000-1½)	980-3	953 (1000-3)	
DME MINIMUMS					
S-16	920-1¼ 893 (900-1¼)	920-2¾ 893 (900-2¾)	920-3	893 (900-3)	
CIRCLING	920-1¼ 893 (900-1¼)	920-2¾ 893 (900-2¾)	920-3	893 (900-3)	

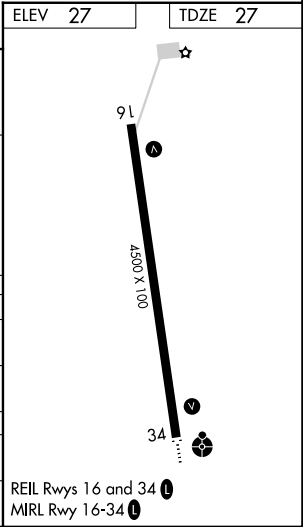

NDB/DME RWY 34
GAMBELL(GAM)(PAGM)

MISSED APPROACH: Climb to 3000 direct GAM NDB/DME and in GAM NDB/DME holding pattern.

AWOS-3P 125.9	ANCHORAGE CENTER 132.2 281.4	NOME RADIO 122.0	CTAF 122.7 0
-------------------------	--	----------------------------	------------------------

CAUTION: GAM aural ident should be monitored to ensure against possible reception of foreign stations.


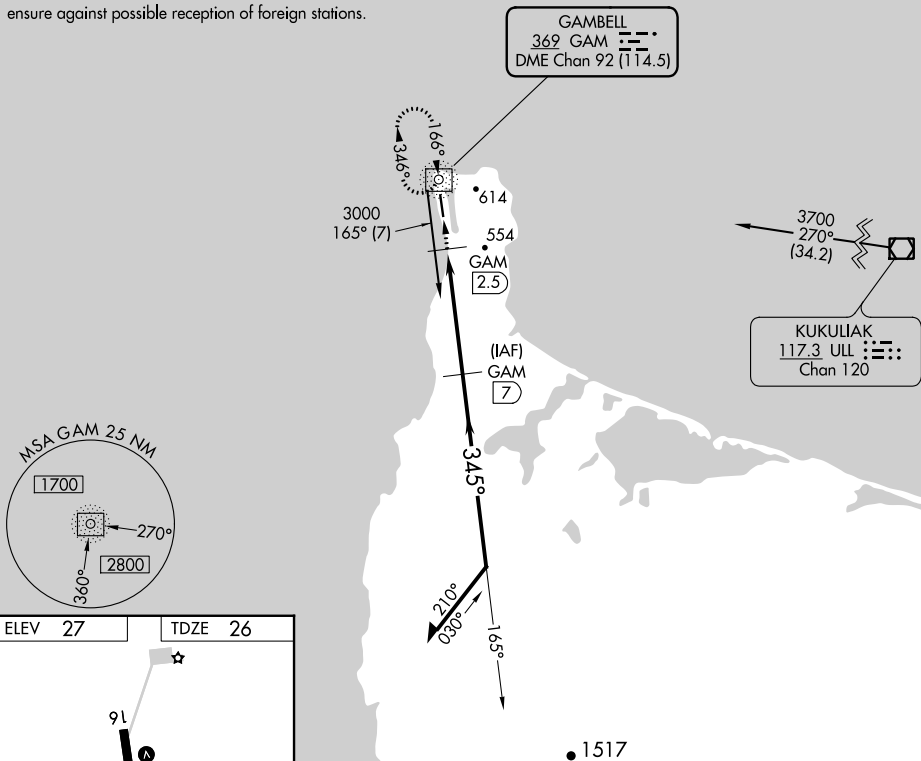


Diagram showing a beam of size 4500 x 100mm. A gap of 34mm is indicated between the beam and a wall. A 16mm gap is also shown at the base of the beam.

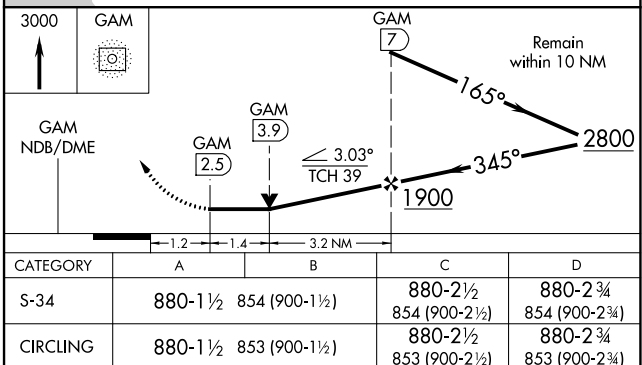

AK, 25 JAN 2024 to 21 MAR 2024


WAAS CH 86635 W16A	APP CRS 164°	Rwy ldg TDZE Apt Elev 4500 30 30
--	------------------------	--

RNAV (GPS) RWY 16


GAMBELL (GAM) (PAGM)

RNP APCH - GPS.		MISSED APPROACH: Climb to 2500 direct KALIX then left turn on track 100° to GIYEN and on track 021° to EEKAY and hold.
	Circling NA east of Rwy 16-34. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C .	
	-27°C	

AWOS-3P 125.9	ANCHORAGE CENTER 132.2 281.4	NOME RADIO 122.0	CTAF 122.7
-------------------------	--	----------------------------	----------------------

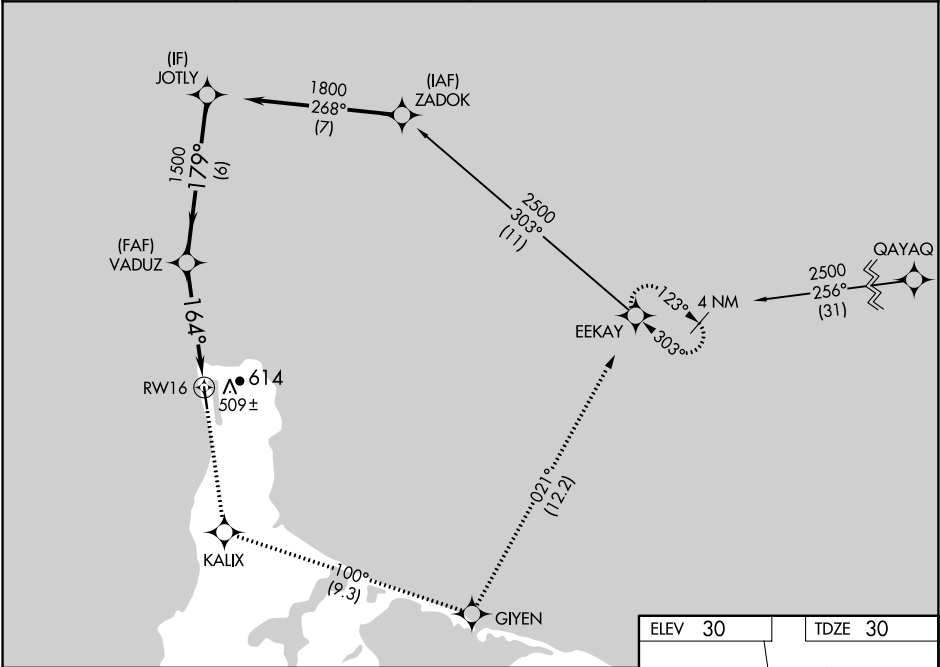

JOTLY		2500	KALIX	GIYEN	tr 021°	EEKAY
1800						
GP 3.00°						
TCH 37						
6 NM		3.1 NM	1.4 NM			
CATEGORY	A	B	C	D		
LPV DA	230-1		200 (200-1)			
LNAV/VNAV DA	523-1 3/8		493 (500-1 3/8)			
LNAV MDA	520-1 490 (500-1)		520-1 3/8 490 (500-1 3/8)			
CIRCLING	520-1 490 (500-1)		520-1 1/2 490 (500-1 1/2) 660-2 630 (700-2)			

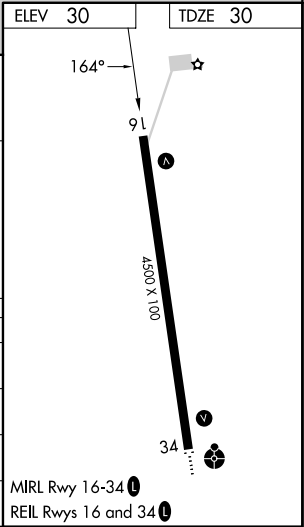

GAMBELL, ALASKA

AL-6687 (FAA)

23222


WAAS CH 82135 W34A	APP CRS 344°	Rwy Idg TDZE 4500 29 Apt Elev 30
--	------------------------	---

RNAV (GPS) RWY 34


GAMBELL (GAM) (PAGM)

RNP APCH - GPS.	ODALS 	MISSED APPROACH: Climb to 2500 direct VADUZ then right turn on track 048° to ZADOK and on track 123° to EEKAY and hold.
Circling NA east of Rwy 16-34. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. For inop ALS, increase LNAV/VNAV Cat A and B visibility to 1 1/4 SM. Inop table does not apply to LPV all Cats and LNAV Cats A and B visibilities.		

AWOS-3P 125.9	ANCHORAGE CENTER 132.2 281.4	NOME RADIO 122.0	CTAF 122.7 0
-------------------------	--	----------------------------	------------------------

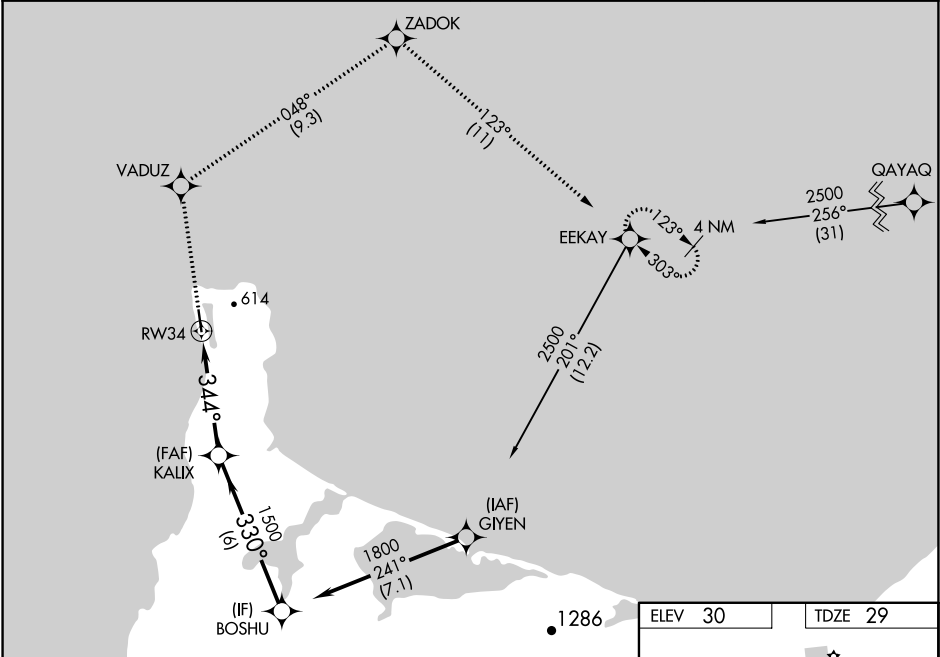

2500	VADUZ	ZADOK	EEKAY		
					
	tr 048°		tr 123°		
				KALIX	BOSHU
				1500	1800
				1.7 NM to RW34	
				344°	330°
				1500	
				GP 3.00°	
				TCH 39	
				1.7 NM	2.8 NM
				6 NM	
CATEGORY	A	B	C	D	
LPV DA	229-1 200 (200-1)				
LNAV/VNAV DA	459-1½ 430 (500-1½)				
LNAV MDA	600-1 571 (600-1)		600-1½ 571 (600-1½)		
CIRCLING	600-1 570 (600-1)		600-1½ 570 (600-1½)		660-2 630 (700-2)

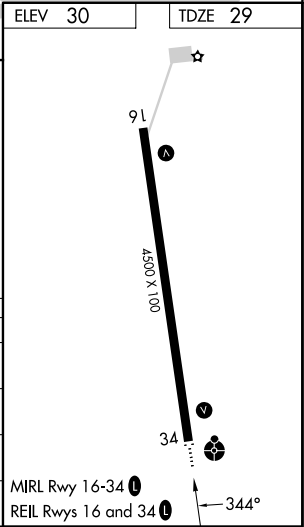

GAMBELL, ALASKA
Amdt 1 10AUG23

63°46'N-171°44'W

GAMBELL (GAM) (PAGM)

RNAV (GPS) RWY 34

AK, 25 JAN 2024 to 21 MAR 2024

AK, 25 JAN 2024 to 21 MAR 2024