

DENISON, IOWA

AL-5458 (FAA)

23222

WAAS CH 90409 W12A	APP CRS 120°	Rwy Idg 5000 TDZE 1274 Apt Elev 1274
--	------------------------	---

RNAV (GPS) RWY 12
DENISON MUNI (DNS)

RNP APCH-GPS.


⚠ Circling NA to Rwy 18 and 36. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Baro-VNAV and VDP NA when using Carroll altimeter setting. When local altimeter setting not received, use Carroll altimeter setting; increase LPV DA 1596 feet, LNAV/VNAV DA to 1626 feet; increase all MDAs 80 feet and visibility LNAV Cat C ½ SM and Circling Cat C ¼ SM.

MISSED APPROACH:
Climb to 3900 direct
OTLAZ and hold.

AWOS-3
119.95


MINNEAPOLIS CENTER
119.6 290.4

UNICOM
122.8 (CTAF) **L**

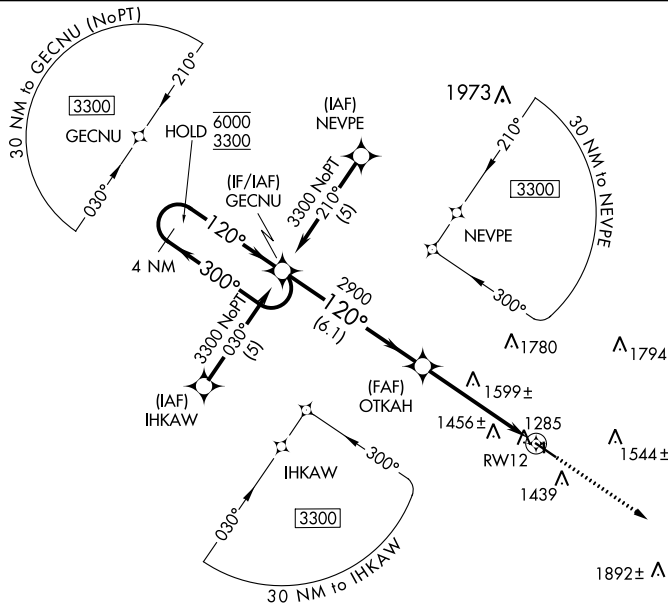

ELEV 1274

TDZE 127.

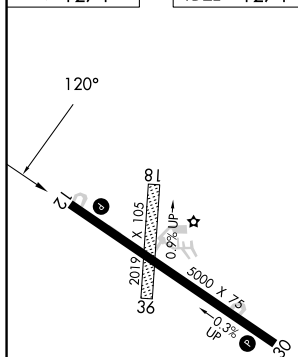

MIRL Rwy 12-30 **L**
REIL Rwy 12 and 30 **L**

DENISON, IOWA
Amdt 1C 15JUL21

41°59'N-95°23'W

DENISON MUNI (DNS)

RNAV (GPS) RWY 12

NC-3, 22 FEB 2024 to 21 MAR 2024

4 NM Holding Pattern

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00°/TCH 27°).

3900 OTLAZ

GECNU

OTKAH

2900

2900

120°

120°

120°

GP 3.00° TCH 40

*1.8 NM to RW12

RW12

6.1 NM

3.1 NM

1.8

*RNAV only

CATEGORY	A	B	C	D
LPV DA	1524-1	250 (300-1)		NA
RNAV/VNAV DA	1554-1	280 (300-1)		NA
RNAV MDA	1860-1	586 (600-1)	1860-1 $\frac{3}{4}$ 586 (600-1 $\frac{3}{4}$)	NA
CIRCLING	1860-1 586 (600-1)	1880-1 606 (700-1)	2100-2 $\frac{1}{2}$ 826 (900-2 $\frac{1}{2}$)	NA

DENISON, IOWA
Amdt 1C 15JUL21